

DIRECT DRIVE PORTABLE BLOWER



**36" Size
(PB 36-D)
\$418.00**

**42" Size
(PB 42-D)
\$587.95**

Model Number	Motor HP	CFM		Cord Length	Switch	Amps High
		High	Low			
PB 36-D	1/3	12500	9000	12'	Rocker	5.5
PB 42-D	1/2	15600				6.0

8" RUBBER WHEELS

Motor: Single Phase, Ball-Bearing, Permanently Lubricated, PSC Type

Blade: Steel Hub, Spider, & Paddles

Switch: Rocker

Cord: 12' Long SJT Type 3 Conductor

Guard: Spiral Steel Wire Powder Coated (front & rear)

Wheels: 8" Rubber

Housing: Corrosion & Dent Resistant High Density Polyethylene Housing

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



BELT DRIVE PORTABLE BLOWER



STANDARD MODEL



SWIVEL MODEL

Size	RPM	Motor HP	CFM	Amps	Standard		Swivel	
					Model	Price	Model	Price
36"	500	1/2	14500	8	PB 36-B	\$621.50	PBS 36-B	\$732.05
48"	390	1	22700	15	PB 48-B	\$796.95	PBS 48-B	\$948.75

SWIVEL MODEL ROTATES 360°

Motor: Single Phase, Ball-Bearing, Permanently Lubricated, Capacitor Start

Blade: Steel Hub, Spider, & Paddles

Switch: Rocker

Cord: 12' Long SJT Type 3 Conductor


Guard: Spiral Steel Wire Powder Coated (front & rear)

Wheels: 10" Rubber

Housing: Corrosion & Dent Resistant High Density Polyethylene Housing

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

SHUTTER MOUNTED EXHAUST FAN



Model Number	Size	Motor HP	CFM			Max Amps	Motor Bearing	Motor Speeds
			High	Med	Low			
CE 12-DS	12"	1/12	825	710	560	1.1	Sleeve	3-Speed
CE 16-DS	16"	1/8	2100	1900	1700	2.1	Sleeve	3-Speed
CE 18-DS	18"	1/8	2300	2100	1850	2.2	Sleeve	3-Speed
CE 20-DS	20"	1/4	2925	NA	2380	2.3	Ball Bearing	2-Speed
CE 24-DS	24"	1/4	3400	NA	2770	2.5	Ball Bearing	2-Speed

**12" Size
(CE 12-DS)
\$194.15**

**16" Size
(CE 16-DS)
\$257.40**

**18" Size
(CE 18-DS)
\$279.95**

**20" Size
(CE 20-DS)
\$331.65**

**24" Size
(CE 24-DS)
\$369.05**

Motor: 120V, Single Phase, Permanently Lubricated, U.L. Listed

Switch: Pull Chain

Cord: No Cord - Junction Box For Direct Wiring

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

INDUSTRIAL CEILING FANS



Motor: 18 pole, 115V, 1-Phase, capacitor type, impedance protected motor with sealed ball bearings.

Mount: 24" down rod with safety cable. Mount to 3/8" diameter steel J-hook

Material: All metal construction with white epoxy finish.

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.

Commercial Grade

- Assembly required
- 30" lead wires
- 1 year limited warranty

**(CHR-56*) - 56"
Down Draft
\$100.10**

Industrial Grade

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 3 year limited warranty

**(IHR-56R*) - 56"
Reversible
\$144.65**


Heavy Duty Grade

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 6 year limited warranty

**(HDHR-60WR) - 60"
Down Draft
Water/Dust Resistant
\$224.40**

* 277 volt, commercial, and reversing models have lead wires instead of cordset. 36" down rod available for additional charge.

24" & 30" MINI-BLOWER



**24" Floor Model
MB 24-DF
\$360.80**

**30" Floor Model
MB 30-DF
\$398.75**

Model Number	Size	Motor HP	CFM		Cord Length	Amps High
			High	Low		
MB 24-DF	24"	1/4	6800	5000	10'	2.2
MB 30-DF	30"	1/4	7800	6000		2.5



Motor: 2 Speed, 120V, 1/4 HP, Totally

Enclosed, Ball-Bearing, PSC Type

Cord: 10' Long SJT Type 3 Conductor

Guard: Spiral Wire (front & rear)

Housing: Corrosion & Dent Resistant High Density Polyethylene Housing

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



TPI CORPORATION

~
INDUSTRIAL FAN
SUMMER SALE 2016

PORTABLE EVAPORATIVE COOLERS



FRONT

**15°F - 25°F OF EVAPORATIVE COOLING
- PLUS -
6°F - 8°F OF WIND CHILL COOLING
36" UNIT IS THIN ENOUGH TO FIT
THROUGH A STANDARD DOOR.**



BACK

- 36" and 48" non hazardous location models feature 3/4" garden hose connections for longer operating times.
- Durable polyethylene housing features leakproof, one piece construction
- Lowers temperatures 15-25 °F depending on climate conditions
- Heavy Duty, polyolefin casters on evaporative coolers
- New 3 blade fan blade for quieter operation.
- Manufactured in USA. Shipped completely assembled, ready to use
- Consult factory for additional sizes. Hazardous location models available

**36" - 1 Phase
(EVAP36-1)
\$2,404.60**

**36" - 3 Phase
(EVAP36-3)
\$2,630.10**

**48" - 2 Phase
(EVAP48-2)
\$3,726.80**

Model Number	Motor HP	Unit AMPS	CFM			Effective Sq. FT.	Internal Water (Gallons)	Dimensions L x W x H (Inches)	WT. (LBS)
			High	Med	Low				
EVAP36-1	1/2	12.4	9600			2500	32	32 x 62 x 67	235
EVAP36-3	1/2	11.5	9600	6600	4800	2500	32	32 x 62 x 67	245
EVAP48-2	1	13.7	22000	----	11000	4000	40	36 x 74 x 86	405

CORROSION RESISTANT INDUSTRIAL FANS



FLOOR MODEL


**(F-18-CR)
\$213.00
(F-24-CR)
\$245.00**

Motor: 3 Speed, 1/8 HP, 120V, Single Phase, Sleeve-Bearing, Permanently Lubricated, Totally enclosed PSC Type, Corrosion Resistant, Sealed electrical enclosure

Switch: Pull chain (Corrosion Resistant)

Cord: 10' Long SJTW Type 3 Conductor

Guard: Spiral Wire (FDA white coated)



WALL/CEILING MODEL

**(U-18-CR)
\$213.00
(U-24-CR)
\$244.00**

Size	Motor HP	CFM			Cord Length	Amps High
		High	Med	Low		
18"	1/8	4600	4200	3200	10'	1.5 - 2.2
24"	1/8	5850	5200	3600	10'	2.4

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



30" HEAVY DUTY 1/2 HP CIRCULATOR



FACTORY ASSEMBLED FAN HEAD
SIMPLIFIES INITIAL SET-UP
SAFETY YELLOW COLOR
5 YEAR MOTOR WARRANTY

Size	Motor HP	CFM		Cord Length	Amps High
		High	Low		
30"	1/2	9850	7500	12'	4.0

Motor: 2 Speed, 1/2 HP, 120V, Single Phase, Ball-Bearing, Totally Enclosed, PSC Type
Blade: Steel Hub, Spider, With Aluminum Paddles
Switch: Pull Chain
Cord: 12' Long SJT Type 3 Conductor
Guard: Spiral Steel Wire Powder Coated (front & rear)
Pole: Pedestal Pole Adjusts Center Of Fan From 48" - 67"




Fan Head - (HDH-30) **\$343.75**
Pedestal Base - (HDM-P) **\$112.20**

Must order fan and mount separately.
Meets Federal OSHA Requirements

30" HIGH PERFORMANCE 1/3 HP CIRCULATOR



FAN HEAD
(IHP30-H)
\$257.40
PEDESTAL
(ACM-P)
\$105.60

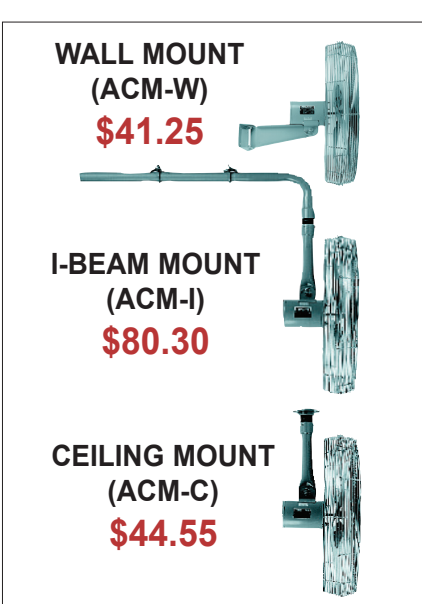

WALL MOUNT
(ACM-W)
\$41.25

I-BEAM MOUNT
(ACM-I)
\$80.30

CEILING MOUNT
(ACM-C)
\$44.55

3 YEAR MOTOR WARRANTY

Size	Motor HP	CFM		Cord Length	Amps High
		High	Low		
30"	1/3	8200	6200	12'	3.4

FAN HEAD ASSEMBLED
AT FACTORY TO
SIMPLIFY INITIAL SET-UP

High performance 1/3 HP motor runs 15 - 18% cooler than standard 1/4 HP motors & allows fan to continue operating in air temperatures up to 135°F.

Motor: 2 Speed, 1/3 HP, 120V, Single Phase, Ball-Bearing, Totally Enclosed, PSC Type
Blade: Steel Hub, Spider, With Aluminum Paddles
Switch: Pull Chain
Cord: 12' Long SJT Type 3 Conductor
Guard: Spiral Steel Wire Coated (front & rear)
Pole: Pedestal Pole Adjusts Center Of Fan From 48" - 67"



Meets Federal OSHA Requirements

INDUSTRIAL FLOOR FAN



(F-18-TE)
\$101.75
(F-24-TE)
\$188.10



(F-18H-TE)
\$147.95
(F-24H-TE)
\$247.50

ALL METAL CONSTRUCTION
TOTALLY ENCLOSED MOTOR
Motor: 3 Speed, 1/8 HP, 120V, Single Phase, Sleeve-Bearing, Permanently Lubricated, PSC Type
Switch: Rotary
Cord: 10' Long SJT Type 3 Conductor
Guard: Spiral Wire



Size	Motor HP	CFM			Cord Length	Amps High
		High	Med	Low		
18"	1/8	4600	4200	3200	10'	1.5
24"	1/8	5850	5200	3600	10'	2.4

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

WORK STATION FAN



12" Size
(U-12-TE)
\$84.20
24" Size
(U-24-TE)
\$195.80

18" Size
(U-18-TE)
\$104.50

MOUNTS TO:
MACHINES, WORKBENCHES,
CEILING OR WALLS WITH
ONE BOLT OR LAG SCREW

Motor: 3 Speed, 120V, Totally Enclosed, Sleeve-Bearing, Permanently Lubricated, PSC Type
Switch: Pull Chain
Cord: 10' Long SJT Type 3 Conductor
Guard: Spiral Coated Steel Wire

Size	Motor HP	CFM			Max Amps
		High	Med	Low	
12"	1/12	1650	1420	1120	1.1
18"	1/8	4600	4200	3200	2.2
24"	1/8	5850	5200	3600	2.4

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



40" LOADING DOCK FAN & LIGHT

Incandescent
(DKL-INC)
\$44.00
40-LDF-TE (40" Arm & 18" Fan Head)
\$213.00
Quartz Halogen
(DKL-QH)
\$65.45



Arm: 1-1/2" Square, 14 Gauge Tubing With Weather Proof Duplex Junction Box
Cord: 5' Long SJT Type 3 Conductor
Fan: 18" All Metal Fan With 3-Speed, 1/8 HP, PSC Totally Enclosed Motor, 2.2A
CFM's = H:5750, M:4700, L:3200

Light Head Type	Max Watts	Max Lumens	Average Bulb Life (Hrs.)	Included	
				Bulb	Guard
Incandescent	300	3700	2000	No	Yes
Quartz Halogen	500	11000	2000	Yes	Yes



Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY

1/4 HP INDUSTRIAL CIRCULATOR



24" Pedestal
(ACU 24-P)
\$248.05

24" Wall Mount
(ACU 24-W)
\$206.80

30" Pedestal
(ACU 30-P)
\$255.20

30" Wall Mount
(ACU 30-W)
\$213.95



Size	Motor HP	CFM		Cord Length	Amps High
		High	Low		
24"	1/4	6800	5000	12'	2.5
30"	1/4	7900	6000	12'	2.7

1 YEAR MOTOR WARRANTY

Motor: 2 Speed, 1/4 HP, 120V, Single Phase, Ball-Bearing, Totally Enclosed, PSC Type
Blade: Steel Hub, Spider, With Aluminum Paddles
Switch: Pull Chain
Cord: 12' Long SJT Type 3 Conductor
Guard: Spiral Steel Wire Coated (front & rear)
Pole: Pedestal Pole Adjusts Center Of Fan From 48 - 67"



Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY
ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

1/4 HP OSCILLATING CIRCULATOR

OSCILLATES
HORIZONTALLY IN
A 90° ARC OR CAN BE
LOCKED IN A FIXED POSITION.

METAL GEARS IN THE OSCILLATING
MECHANISM ALLOW THE FAN TO
OPERATE AT A MAXIMUM 30°
DOWNWARD TILT.




24" Pedestal
(ACU 24-PO)
\$376.20

24" Wall Mount
(ACU 24-WO)
\$315.15

30" Pedestal
(ACU 30-PO)
\$383.90

30" Wall Mount
(ACU 30-WO)
\$322.30



Size	Motor HP	CFM			Cord Length	Amps High
		High	Med	Low		
24"	1/4	6800	5000	4100	12'	2.5
30"	1/4	7900	6000	4750	12'	2.5

Motor: 3 Speed, 1/4 HP, 120V, Single Phase, Ball-Bearing, Totally Enclosed, PSC Type
Blade: Steel Hub, Spider, With Aluminum Paddles
Switch: Pull Chain
Cord: 12' Long SJT Type 3 Conductor
Guard: Spiral Steel Wire Coated (front & rear)
Pole: Pedestal Pole Adjusts Center Of Fan From 43" - 60"



Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY
ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON