



Markel[®]

Products Company

THE CHOICE OF PROFESSIONALS SINCE 1921

www.markel-products.com

Tel: 1-800-682-3398 | 1-423-477-4131 | Fax: 1-423-477-0064

2017

FANS

LIGHTS



VENTILATION, FANS, & INDUSTRIAL LIGHTING
INDUSTRIAL - COMMERCIAL - RESIDENTIAL

© Copyright 2017; TPI Corporation, P.O. Box 4973, Johnson City, TN 37602
November 1, 2016: Distribution Products Catalog Revision: 110116-001



www.facebook.com/tpicorporation



[@tpicorporation](https://twitter.com/tpicorporation)



Table Of Contents & Limited Warranty

CATEGORY	Page
INDUSTRIAL CIRCULATORS	
24" & 30" Assembled Maximum Duty	2
24" & 30" Unassembled Maximum Duty	3
24" & 30" Heavy Duty Yellow	4
24" & 30" Assembled Heads & Mounts	5
24" & 30" Unassembled	6
20" Circulators & Components	7
20" 24" & 30" Specialty Heads	8
COMMERCIAL CIRCULATORS	
24" & 30" Commercial Circulators	9
24" & 30" Commercial Oscillators	9
COMMERCIAL BLOWERS	
36" 42" & 48" Belt Drive Portable	10
30" & 36" Direct Drive Portable	10
INDUSTRIAL BLOWERS	
30" 36" & 42" Direct Drive Portable	11
48" Direct Drive Portable	11
36" 42" & 48" Belt Drive Portable	12
30" 36" & 42" Direct Drive Suspension	13
36" 42" & 48" Belt Drive Suspension	13
Heavy Duty Direct Drive	14
Heavy Duty Permanent Mount Direct Drive	15
24" & 30" Mini	16
Heavy Duty Square Belt Drive Portable	16
WORKSTATION FANS	
Industrial Floor	17
Corrosion Resistant Industrial Floor	17
Industrial Mounted	18
Commercial Floor	18
Oscillating Office	18
Wall Mounted With Pivoting Arm	19
Low Velocity "Special Application"	19
EVAPORATIVE COOLERS	
Portable Workstation (Evap Mini)	20
36" & 48" Hazardous Location	20
16" 24" 36" & 48" Portable	21
Replacement Media Pads	21
MISTING FANS	
18" Portable Self Contained	22

CATEGORY	Page
CEILING FANS	
Industrial Ceiling Fans	22
EXHAUST FANS & GUARDS	
Shutter Mounted Direct Drive	23
Guard Mounted Direct Drive	24
Venturi Mounted Direct Drive	25
Commercial - (Fans & Shutters)	26
Industrial Direct Drive	27
Industrial Belt Drive	28
Heavy Duty Direct Drive	29
Heavy Duty Belt Drive	30
Cabinet Exhaust Fans With Shutters	31
Accessories / Heavy Duty Shutters	32
Cabinet Accessories / Guards	33
Cabinet Exhaust Fan Package Options	34
Weather Hood	34
ROOF VENTILATORS	
Insulated Roof Curbs	35
Belt Drive Hooded Roof Ventilator	36
Direct Drive Roof Ventilator	37
Belt Drive Roof Ventilator	38
TUBEAXIAL DUCT FAN	
Direct Drive & Guards	39
Belt Drive	40
ATTIC FANS	
Roof Domes, Gable Fans, Attic Fans	41
INDUSTRIAL LIGHT PRODUCTS	
Portable Utility Lights	42-43
Heavy Duty Portable Utility Lights	44
Commercial Duty Portable Utility Lights	44
Loading Dock Lights	45
Loading Dock Light Performance Testing	45
Loading Dock - Fully Assembled, Standard	46
Ceiling Mounted Incandescent Flex Arm	46
Lighthouse Accessories	46
Modular Loading Dock Lights / Heavy Duty	47
Loading Dock Arm Fan	47
Machine Tool Lights	48-49
Illuminated Florescent Magnifiers	49
PRODUCT INDEX	50-54

TPI Corporation provides a limited warranty of materials and workmanship for a period of (i) ten (10) years for elements in 2900 Series baseboard heaters, (ii) two (2) years for Thermostats and Controls, (iii) five (5) years on HD and HDH series fans, (iv) three (3) years on UHP and IHP series fans, (v) and twelve (12) months for all other products, with the warranty period commencing on the original date of purchase. The TPI warranty is limited to materials manufactured and work performed by TPI Corporation, and does not include damage or failure caused by acts of God, abuse, misuse, connected to or placed on other than rated voltage, abnormal usage, faulty installation, failure to follow suggested maintenance procedures enclosed with the product, improper maintenance or any repairs other than those provided by an authorized TPI Corporation service center. For the name of your nearest authorized TPI Corporation service center, please write to TPI Corporation, P.O. Box 4973, Johnson City, Tennessee, 37602 or call 1-800-682-3398.

During the warranty period, TPI Corporation will, at its sole option, repair or replace any defective parts or products returned, freight prepaid, to the TPI Corporation factory or such other location as TPI Corporation may designate. No parts or products will be accepted for repair or replacement without prior authorization from TPI Corporation and a return merchandise authority (RMA) number issued by TPI Corporation. Returned products must be packaged carefully and TPI Corporation shall not be responsible for damage in transit. When returning parts, the owner must provide the model number of the product and nature of difficulty being experienced.

This warranty does not obligate TPI Corporation to bear the cost of labor in replacing any assembly, unit or component part thereof, nor does TPI Corporation assume any liability for secondary charges, expenses for installing or removal, freight or damages. There will be charges rendered for product repairs made after the warranty period has expired. Proof of purchase, including date, must accompany request for in-warranty service. This warranty gives you specific legal rights and you may have other rights, which may vary, from state to state.

Except for the limited warranty provided in the foregoing paragraph, all parts and products sold by TPI Corporation are sold 'as is', 'where is', and without any other warranty of any kind or nature, whether express, implied, or statutory and including, without limitation, any implied warranty of specific performance or merchantability.

Under no circumstances, even with respect to claims covered by the foregoing warranty, will TPI Corporation be responsible for any incidental, consequential, special, or punitive damages of any kind or nature arising from or related to the parts or products sold by TPI Corporation.

In any event, TPI Corporation's maximum liability shall not in any case exceed the purchase price for the part or product claimed to be defective.

You hereby expressly agree to waive any and all rights to a trial by jury with respect to any product manufactured or supplied by TPI Corporation.

Ventilation Products Warranty Coverage

Series HD or HDH fans	5 Years
Series UHP or IHP fans	3 Years
All other ventilation products	1 Year

RETURN POLICY:

Requests for returns of non-defective standard stock units may incur testing and repackaging charges if units are not in like new condition. Requests for returns of build to order items are subject to cancellation charges prior to shipment and up to a 100% restocking charge after shipment. This also applies to any standard model with factory installed control options or other custom features. Changes made to custom products during production may incur labor charges. Please consult factory for details on any return or change order

TPI COMMERCIAL CIRCULATORS STATEMENT:

TPI Commercial circulators have been developed to equal the imported circulators that are sold by big-box retail stores and some catalogers. Because these circulators do not have totally enclosed motors, they should be used in clean, dry commercial applications - such as schools, shops, offices, and warehouses.

TPI Industrial Assembled Maximum Duty Circulators

Features

- Easy access hinged guard
- 18" drop down, 2-Speed switch
- Cord options are shown below
- Steel hub/spider aluminum paddle blades
- Powder coated steel guards
- Meets OSHA standards
- 5 year limited warranty
- Made in U.S.A. with domestic and foreign components.

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth



Intertek



Closed (Front)



Open (Front)

Motor Specifications

- 2-Speed
- 1-Phase, 120V
- Permanent split capacitor
- Frame size: 48
- 1/2 HP
- Ball bearing
- Totally enclosed, permanently lubricated
- 1/2" Shaft



Pedestal Specifications


- Pedestal pole adjusts the center of the fan from 48 to 67 inches.
- Pedestal steel dome base is 27" in diameter and has 5 carriage bolts.

Factory Assembled and Tested Fan Heads, Mounts, and Wheel Kits



HDM-C
CEILING MOUNT

Note: 1 1/2" pipe piece required for assembly



HDM-I
I-BEAM MOUNT

Note: 1 1/2" pipe piece required for assembly



HDM-W
WALL MOUNT



OPTIONAL
WHEEL KIT

Standard Models

ASSEMBLED FAN HEAD		COLOR	BLADE SIZE	HP	CFM* / RPM		VELOCITY PROFILE	AMPS	WT. (LBS)
MFG CATALOG NUMBER	MFG MODEL NUMBER				HIGH	LOW	CFM / Area Sq Ft		
08744402	HDH 24-JR	Yellow	24"	1/2	5600 / 1100	4900 / 800	7500 / 260	3.5	44
08744602	HDH 30-JR	Yellow	30"		6800 / 1100	6000 / 800	8000 / 270	4	48
08745002	HDH 24-GJR	Gray	24"		5600 / 1100	4900 / 800	7500 / 260	3.5	44
08745102	HDH 30-GJR	Gray	30"		6800 / 1100	6000 / 800	8000 / 270	4	48

*Measured 2 feet from face of fan

Accessories

MFG CATALOG NUMBER	MFG MODEL NUMBER	COLOR	DESCRIPTION	WT. (LBS)
07960902	HDM-P	Yellow	Heavy Duty Pedestal Mount	34
07961002	HDM-W	Yellow	Heavy Duty Wall Mount	3
07961102	HDM-I	Yellow	Heavy Duty I-Beam Mount	9
07961202	HDM-C	Yellow	Heavy Duty Ceiling Mount	3
07961802	ACM-P	Gray	Pedestal Mount	34
07961902	ACM-W	Gray	Wall Mount	3
07962002	ACM-I	Gray	I-Beam Mount	9
07962102	ACM-C	Gray	Ceiling Mount	3
07962202	ACM-S	Gray	Suspension Mount	2
08747202	RS 06-EC	Yellow	6' Extension cord used with drop down power switch	1
08747302	RS 09-EC	Yellow	9' Extension cord used with drop down power switch	1.5
08747402	RS 12-EC	Yellow	12' Extension cord used with drop down power switch	2
08772502	RS 15-EC	Yellow	15' Extension cord used with drop down power switch	2.5
08747502	SCK-12	----	12' Safety cable with clamps	.5
08747602	R1-MOT	Yellow	1/2 HP motor with remote switch	1
08681802	ACM-PM	Standard Black	Pole Mount	5
08681302	ACM-WK	Standard Black	Optional Wheel Kit	4

TPI Industrial Unassembled Maximum Duty Circulators

Features

- Easy access hinged guard
- 18" drop down, 2-Speed switch
- Cord options are shown below
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards
- Made in U.S.A. with domestic and foreign components.

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth



Closed (Front)



Open (Front)



Motor Specifications

- 2-Speed
- 1-Phase, 120V
- Ball bearing
- Frame size: 48
- Totally enclosed
- Permanent split capacitor
- Permanently lubricated
- 1/2" Shaft

Note: 1/3 HP fans come with 3 paddle blades.

Product Specifications


- Pedestal pole adjusts the center of the fan from 48 to 67 inches.
- Pedestal steel dome base is 27" in diameter and has 5 carriage bolts.

TPI Industrial Mounts



CEILING MOUNT

Note: 1 1/2" pipe piece required for assembly



I-BEAM MOUNT

Note: 1 1/2" pipe piece required for assembly



WALL MOUNT



SUSPENSION MOUNT

OPTIONAL WHEEL KIT



Note: Motor, blades, guard, and mount are packed and shipped in a single UPS-able carton.

Standard Models

FAN TYPE		HIGH PERFORMANCE		
MOTOR	HP	1/3		
	SPEEDS	2		
CFM (HIGH/LOW) RPM (HIGH/LOW)	24"	4300 / 3900 1100 / 800		
	30"	5400 / 4700 1100 / 800		
COLOR		GRAY		
POLE ADJUSTMENT		52" to 78"		
WARRANTY		3 YEARS		
SIZE	TYPE of MOUNT	MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)
24"	Pedestal Mount	08745202	UHP 24-PJR	75
	Wall Mount	08745402	UHP 24-WJR	45
	I-Beam Mount	08745602	UHP 24-IJR	50
	Ceiling Mount	08745802	UHP 24-CJR	45
	Suspension Mount	08746002	UHP 24-SJR	43
30"	Pedestal Mount	08745302	UHP 30-PJR	78
	Wall Mount	08745502	UHP 30-WJR	48
	I-Beam Mount	08745702	UHP 30-IJR	53
	Ceiling Mount	08745902	UHP 30-CJR	48
	Suspension Mount	08746102	UHP 30-SJR	46

Accessories

MFG CATALOG NUMBER	MFG MODEL NUMBER	COLOR	DESCRIPTION	WT. (LBS)
08747202	RS 06-EC	Yellow	6' Extension cord used with drop down power switch	1
08747302	RS 09-EC	Yellow	9' Extension cord used with drop down power switch	1.5
08747402	RS 12-EC	Yellow	12' Extension cord used with drop down power switch	2
08747502	SCK-12	----	12' Safety cable with clamps	.5
08747702	R2-MOT	Gray	1/3 HP motor with drop down remote switch	1
08747802	R3-MOT	Gray	1/4 HP motor with drop down remote switch	1

TPI Industrial Heavy Duty Yellow Air Circulator

Features

- Pull chain switch
- Cord-SJT type 3 conductor, 12' long
- Steel hub/spider aluminum paddle blades
- Powder coated steel guards
- Meets OSHA standards
- 5 year limited warranty
- Made in U.S.A. with domestic and foreign components.

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth

Motor Specifications

- 2-Speed
- 1 Phase, 120V
- Permanent split capacitor
- Frame size: 48
- 1/2 HP
- Ball bearing
- Totally enclosed, permanently lubricated
- 1/2" Shaft

Pedestal Specifications

- Pedestal pole adjusts the center of the fan from 48 to 67 inches.
- Pedestal steel dome base is 27" in. diameter and has 5 carriage bolts.



HDH-30 FAN HEAD
WITH HDM-P
PEDESTAL MOUNT




Factory Assembled and Tested Fan Heads, Mounts, and Wheel Kits



HDM-C
CEILING MOUNT

Note: 1 1/2" pipe piece
required for assembly



HDM-I
I-BEAM MOUNT

Note: 1 1/2" pipe piece
required for assembly



HDM-W
WALL MOUNT



OPTIONAL
WHEEL KIT

Standard Models

SIZE	CFM* / RPM		VELOCITY PROFILE	AMPS HIGH	FAN TYPE	FAN HEAD		MOUNT		WT. (LBS)
	HIGH	LOW	CFM / Area Sq Ft			MFG CATALOG NUMBER	MFG MODEL NUMBER	MFG CATALOG NUMBER	MFG MODEL NUMBER	
24"	5600 / 1100	4900 / 800	7500 / 260	3.5	Fan Head	07960702	HDH 24	-----	-----	44
					Pedestal Fan		HDH 24	07960902	HDM-P	78
					Wall Mount Fan		HDH 24	07961002	HDM-W	47
					I-Beam Mount Fan		HDH 24	07961102	HDM-I	53
					Ceiling Mount Fan		HDH 24	07961202	HDM-C	47
30"	6800 / 1100	6000 / 800	8000 / 270	4	Fan Head	07960802	HDH 30	-----	-----	48
					Pedestal Fan		HDH 30	07960902	HDM-P	82
					Wall Mount Fan		HDH 30	07961002	HDM-W	51
					I-Beam Mount Fan		HDH 30	07961102	HDM-I	57
					Ceiling Mount Fan		HDH 30	07961202	HDM-C	51
Optional Wheel Kit							08681302	ACM-WK	4	

*Measured 2 feet from face of fan

TPI Industrial Assembled Circulator Heads and Mounts

Features

- Pull chain switch
- SJT type 3 conductor, 12' long cord
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards
- Made in U.S.A. with domestic and foreign components.

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth



ACH 30

Motor Specifications

- 2-Speed
- 1 Phase, 120V
- Ball bearing
- Frame size: 48
- Totally enclosed
- Permanent split capacitor
- Permanently lubricated
- 1/2" Shaft



Product Specifications

- Oscillating model oscillates in a 90° arc or can be locked in a fixed position
- Metal gears in the oscillating mechanism allow the fan to operate at a maximum 30° downward tilt

Standard Models

H.P.	BLADE SIZE	MFG MODEL NUMBER	MFG CATALOG NUMBER	FAN HEAD TYPE	CFM*	VELOCITY PROFILE	RPM	AMPS	WT. (LBS)
						CFM / Area Sq Ft			
Industrial 1/4	24"	ACH 24	07961602	STATIONARY	3800 / 3400	6000 / 240	1100 / 800	2.5	40
	30"	ACH 30	07961702		4300 / 3800	7200 / 250	1100 / 800	2.7	44
1 Year Warranty									
High Performance 1/3	24"	IHP 24-H	07989802	STATIONARY	4300 / 3900	6000 / 240	1100 / 800	2.8	40
	30"	IHP 30-H	07989902		5400 / 4700	7200 / 250	1100 / 800	3	44
3 Year Warranty									
Heavy Duty 1/2	24"	HDH 24-G	08539202	STATIONARY	5600 / 4900	6000 / 240	1100 / 800	3.5	44
	30"	HDH 30-G	08528602		6800 / 6000	7200 / 250	1100 / 800	4	48
5 Year Warranty									
Industrial Oscillating 1/4	20"	ACH 20-O	08684802	OSCILLATING	3000 / 2600	5000 / 200	1100 / 900	2.4	43
	24"	ACH 24-O	07963602		3800 / 3400	6000 / 240	1100 / 800	2.5	44
	30"	ACH 30-O	07963702		4300 / 3800	7200 / 250	1100 / 800	2.7	48
1 Year Warranty									

*Measured 2 feet from face of fan

TPI offers six factory assembled and tested fan mounts that can be used with any of the non-oscillating TPI Industrial heads.

Industrial Mounts

MOUNT	MFG MODEL NUMBER	MFG CATALOG NUMBER	WT. (LBS)
Pedestal (1/2HP Models)	GACM-P	08753802	34
Pedestal (1/3 & 1/4HP Models)	ACM-P	07961802	34
Wall Mount	ACM-W	07961902	3
I-Beam Mount	ACM-I	07962002	9
Ceiling Mount	ACM-C	07962102	3
Suspension Mount	ACM-S	07962202	2
Pole Mount	ACM-PM	08681802	5
Optional Wheel Kit	ACM-WK	08681302	4

Features

- Pull chain switch
- SJT type 3 conductor, 12' long cord
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards
- Motor, blades, guard, and mount are packed and shipped in a single UPS-able carton.
- Made in U.S.A. with domestic and foreign components.



WALL
MOUNT



PEDESTAL

Motor Specifications

- 2-speed
- 1-Phase, 120V
- Ball bearing
- Frame size: 48
- Totally enclosed
- Permanent split capacitor
- Permanently lubricated
- 1/2" Shaft

DIMENSIONS	
24"	27" Diameter x 14.5" Depth
30"	33.5" Diameter x 14.5" Depth

Product Specifications

- Oscillating model oscillates in a 90° arc or can be locked in a fixed position
- Metal gears in the oscillating mechanism allow the fan to operate at a maximum 30° downward tilt

Standard Models

FAN TYPE		HIGH PERFORMANCE			STANDARD INDUSTRIAL			OSCILLATING		
MOTOR	HP	1/3			1/4			1/4		
	SPEEDS	2			2			2		
CFM / RPM	24"	4300 / 3900 1100 / 800			3800 / 3400 1100 / 800			3800 / 3400 1100 / 800		
	30"	5400 / 4700 1100 / 800			4300 / 3800 1100 / 800			4300 / 3800 1100 / 800		
COLOR		GRAY			GRAY			GRAY		
POLE ADJUSTMENT		52" to 78"			52" to 78"			52" to 78"		
WARRANTY		3 YEARS			1 YEAR			1 YEAR		
SIZE	TYPE of MOUNT	MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)	MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)	MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)
24"	Pedestal Mount	07990002	UHP 24-P	75	07962302	ACU 24-P	75	07964002	ACU 24-PO	79
	Wall Mount	07990202	UHP 24-W	45	07962402	ACU 24-W	45	07964102	ACU 24-WO	49
30"	Pedestal Mount	07990102	UHP 30-P	73	07962802	ACU 30-P	73	07964202	ACU 30-PO	82
	Wall Mount	07990602	UHP 30-W	48	07962902	ACU 30-W	48	07964302	ACU 30-WO	52

TPI Industrial 20" Circulators

7



PEDESTAL



WALL MOUNT



Features

- Pull chain switch
- SJT type 3 conductor, 12' long cord
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards
- 1 Year limited warranty
- Made in U.S.A. with domestic and foreign components.

DIMENSIONS

22" Diameter x 14.5" Depth

Motor Specifications

- 2-Speed
- 1-Phase, 120V
- Ball bearing
- Frame size: 48
- 1/4 HP
- Permanent split capacitor
- Totally enclosed, permanently lubricated
- 1/2" Shaft

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	STYLE	MOUNT TYPE	CFM / RPM	AMPS (HIGH)	WT. (LBS.)
08681402	ACU 20-P	Unassembled all components and mount in one box	Pedestal Mount	3000 / 2600 1100 / 900	2.4	72
08681602	ACU 20-PO		Pedestal Mount			76
08681502	ACU 20-W		Wall Mount			42
08681702	ACU 20-WO		Wall Mount			46
08684702	ACH 20	Assembled Fan Head	None - use with any TPI "ACM" or "CACM" Mount			39

TPI Industrial Circulator Components

Motors

TYPE	MFG CATALOG NUMBER	MFG MODEL NUMBER
HEAVY DUTY	07961302	HD-MOT
HIGH PERFORMANCE	07995102	IHP-MOT
INDUSTRIAL	07963302	AC-MOT
OSCILLATING	07964402	AC-MOT-O

Guards & Blades

TYPE	MFG CATALOG NUMBER	MFG MODEL NUMBER
YELLOW GUARD & BLADE FOR 1/2 HP MOTOR		
24"	07961402	HD-24GB
30"	07961502	HD-30GB
SILVER GUARD & BLADE FOR 1/2 HP (HD) MOTOR		
24"	07964502	HD-24GB-C
30"	07964602	HD-30GB-C
SILVER GUARD & BLADE FOR 1/3HP & 1/4HP MOTORS		
24"	07963402	AC-24GB
30"	07963502	AC-30GB

Mounts

TYPE	MFG CATALOG NUMBER	MFG MODEL NUMBER
YELLOW MOUNTS		
PEDESTAL POLE & BASE	07960902	HDM-P
WALL MOUNT	07961002	HDM-W
I-BEAM MOUNT	07961102	HDM-I
CEILING MOUNT	07961202	HDM-C
GRAY MOUNTS		
PEDESTAL POLE & BASE	07961802	ACM-P
WALL MOUNT	07961902	ACM-W
I-BEAM MOUNT	07962002	ACM-I
CEILING MOUNT	07962102	ACM-C
SUSPENSION MOUNT	07962202	ACM-S
POLE MOUNT	08681802	ACM-PM
WHEEL KIT	08681302	ACM-WK
COMMERCIAL MOUNTS		
PEDESTAL POLE & BASE	08697502	CACM-P
FDA WHITE MOUNTS (FOR USE WITH WASHDOWN FAN HEADS IN FOOD SERVICE APPLICATIONS)		
PEDESTAL POLE & BASE	08682502	WACM-P
WALL MOUNT	08682602	WACM-W

TPI Industrial Specialty Circulator Heads

8



Features

- No cord-junction box provided for hard wiring
- Steel hub/spider aluminum paddle blades
- Coated steel guards
- Meets OSHA standards
- 1 year limited warranty
- Made in U.S.A. with domestic and foreign components.

Motor Specifications

- All 1 Speed (except 277V which is 2 Speed)
- Totally enclosed, permanently lubricated
- Ball bearing

Standard Models

GENERAL DESCRIPTION	MFG MODEL NUMBER	MFG CATALOG NUMBER	SIZE	CFM*		VELOCITY PROFILE CFM / Area Sq Ft	MOTOR			AMPS (HIGH)					WT. (LBS)
				HIGH	LOW		HP	RPM	VOLTS	120v 1 ph	240v 1 ph	277v 1 ph	240v 3 ph	480v 3 ph	
Hazardous Location Class I Group D Class II Group F & G Unassembled Head	ACH 24-EX1	08551902	24"	4300		6000 / 240	1/4	1725	120 or 240 1-phase	5	2.6	----	----	----	66
	ACH 30-EX1	08552002	30"	5400		7200 / 250									69
	ACH 24-EX3	08552102	24"	4300		6000 / 240									66
	ACH 30-EX3	08552202	30"	5400		7200 / 250							1.4	0.7	69
240V / 480V 3-Phase Unassembled Head	ACH 24-TE3	08552302	24"	4300		6000 / 240	1/4	1725	240 or 480 3-phase	----	----		1.4	0.7	45
	ACH 30-TE3	08552402	30"	5400		7200 / 250									48
277 Volt Assembled Head	IHP 24-H-277	08541302	24"	4300	3900	6000 / 240	1/3	1125	277 1-phase	----	----	1	----	----	40
	IHP 30-H-277	08542202	30"	5400	4700	7200 / 250									44
Wash down rated 120V / 240V 1-Phase Assembled Head	IHP 20-H-WD	08721902	20"	3200		5200 / 220	1/3	1725	120 or 240 1-phase	4.5	2.2		----	----	46
	IHP 24-H-WD	08541802	24"	4300		6000 / 240									48
	IHP 30-H-WD	08541902	30"	5400		7200 / 250									52


*Measured 2 feet from face of fan

Note: Wash down rated fan heads have heavy zinc coated guards - Use FDA white coated mounts shown on page 8 for food service applications.

Product Specifications

- Pedestal pole adjusts the center of fan from 48" to 67" and bolts to 27" diameter steel dome base with 5 carriage bolts
- I-beam mount & ceiling mount require 1 1/2" or longer pipe nipple for assembly (not supplied)
- Pole mount attaches to 4", 6", or 8" with U-bolts (not supplied)

Standard Models

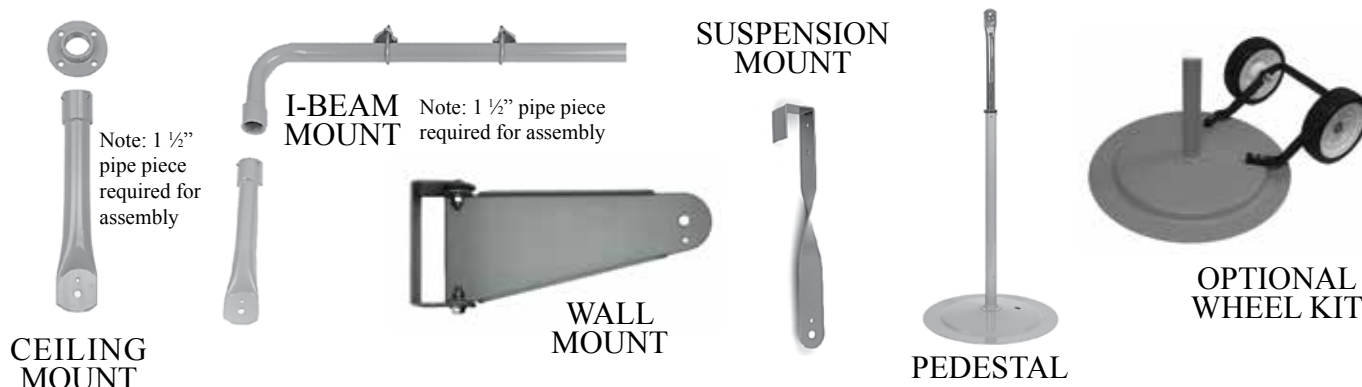

CIRCULATOR MOUNT	MFG MODEL NUMBER	MFG CATALOG NUMBER	WT. (LBS)
Pedestal	ACM-P	07961802	34
Wall Mount	ACM-W	07961902	3
I-Beam Mount	ACM-I	07962002	9
Ceiling Mount	ACM-C	07962102	3
Suspension Mount	ACM-S	07962202	2
Pole Mount	ACM-PM	08681802	5
Optional Wheel Kit	ACM-WK	08681302	4

TPI Commercial Circulators

9



These circulators should be used in clean and dry commercial applications - such as schools, shops, offices or warehouses.

Commercial Circulator

Motor, blades, guards, and mount are packed and shipped in a single UPS-able carton.

Features

- Pull chain switch.
- SJT type 3 conductor, 9' long cord.
- Coated steel guards with retaining clips.
- Steel hub/spider aluminum paddle blades.
- Pole adjusts center of fan from 43" to 60".
- Meets OSHA standards.
- 1 Year limited warranty.
- Imported to TPI specifications

Motor Specifications

- 1-Phase
- 120V
- 1/4 HP, 1/3 HP on HD Models
- 2 or 3-Speed
- Ball bearing
- Permanently lubricated
- Open ventilated
- Permanent split capacitor

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	SIZE	HP	TYPE	MOUNT TYPE	CFM*			VELOCITY PROFILE	AMPS (HIGH)	WT. (LBS)
						HIGH	MED	LOW	CFM / Area Sq Ft		
08706202	CACU 24-P	24"	1/4	Standard	Pedestal Mount	3400	3100	2800	5400 / 220	2.3	63
08706402	CACU 24-W				Wall Mount						43
08697402	CACU 30-P	30"			Pedestal Mount	4200	3800	3500	6700 / 240	2.4	66
08706302	CACU 30-W				Wall Mount						46
08761702	CACU 30-P-HD	30"	1/3	Heavy Duty	Pedestal Mount	5000	4600	4200	7000 / 250	3.60	56

*Measured 2 feet from face of fan

Note: Stocked models may differ in appearance from photograph

TPI Commercial Oscillating Fans

Commercial wall mount and pedestal fans now available from TPI.

Units imported to TPI specifications.

Standard Models



MFG CATALOG NUMBER	MFG MODEL NUMBER	SIZE	HP	TYPE	MOUNT TYPE	CFM*			VELOCITY PROFILE	AMPS			WT (LBS)
						HIGH	MED	LOW	CFM / Area Sq Ft	HIGH	MED	LOW	
08748902	CACU 24-PO	24"	1/4	Standard	Pedestal Mount	3200	3000	2800	5100 / 230	1.45	1.15	1.1	68
08749102	CACU 24-WO				Wall Mount								48
08749002	CACU 30-PO	30"			Pedestal Mount	4200	3800	3500	6700 / 250	2.0	1.8	1.6	70
08749202	CACU 30-WO				Wall Mount								51
08761802	CACU 30-PO-HD	30"	1/3	Heavy Duty	Pedestal Mount	5000	4600	4200	7000 / 250	3.60	3.02	2.94	64

*Measured 2 feet from face of fan

Note: Stocked models may differ in appearance from photograph - sizes are nominal.

36", 42", & 48" TPI Commercial Belt Drive Portable Blowers

10



Features

- Rocker switch
- SJT type cord - 3 conductor - 8' long
- Aluminum blade
- Spiral wire front and rear guards
- Powder coated 20 gauge steel housing
- 5" rubber wheels
- Meets OSHA standards / 1 Year limited warranty
- Imported to TPI specifications

Motor Specification

- 2-Speed
- 120V
- Ball bearing
- 1-Phase
- ODP type
- Permanently lubricated

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	CFM*		VELOCITY PROFILE	MAX AMPS	WT. (LBS)
			HIGH	LOW	CFM / Area Sq Ft		
08734702	CPB 36-B	1/3	5,400	4,600	8600 / 300	4.8	82
08706602	CPB 42-B	1/2	7,600	6,700	12000 / 320	6.5	93
08722702	CPB 48-B	3/4	8,800	7,700	14000 / 500	9.0	129

*Measured 2 feet from face of fan

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.

24", 30", & 36" TPI Commercial Direct Drive Portable Blowers



SWIVEL

CPBS 30-D



FLOOR



CPB 36-D

Features

- Rocker switch
- SJT type cord - 3 conductor - 6' long
- Spiral wire front and rear guards
- Powder coated 20 gauge steel housing
- 5" rubber wheels
- Meets OSHA standards
- 1 Year limited warranty
- Imported to TPI specifications

Motor Specification

- 2-Speed
- 120 Volt, 1/3HP
- Ball bearing
- 1-Phase
- Open ventilated
- Permanently lubricated

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	TYPE	CFM*		VELOCITY PROFILE	MAX AMPS	CORD LENGTH	SWITCH	BLADES	WT. (LBS)
			HIGH	LOW	CFM / Area Sq Ft					
08753502	CPB 30-D	Standard / Floor	4,400	3,800	6700 / 250	3.6	6'	ROCKER	ALUMINUM	52
08710302	CPBS 30-D	Standard / Swivel	4,400	3,800	6700 / 250	3.6	6'	ROCKER	ALUMINUM	60
08722602	CPB 36-D	Standard / Floor	5,400	4,600	8500 / 300	3.6	10'	ROTARY	STEEL	70
08770102	CPBS 24-DHV	High Velocity / Swivel	3,400	2,900	5400 / 240	2.4	9'	ROTARY	ALUMINUM	38

*Measured 2 feet from face of fan

Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

30", 36", & 42" TPI Industrial Direct Drive Portable Blowers

11



STANDARD
MODEL



SWIVEL
MODEL



Features

- Comes in sizes 30", 36", & 42"
- Rocker switch
- SJT type 3 conductor, 12' long cord
- Aluminum, 3 paddle blade
- Spiral, wire front and rear guards
- Corrosion and dent proof high density polyethylene housing
- 36" & 42" swivel model rotates 130° in 12 1/2° increments and locks in place with a steel locking pin
- Meets OSHA standards
- 1 Year limited warranty
- Made in U.S.A.

Motor Specifications

- 120V, 1-Phase
- 36"-1/3HP 42"-1/2HP
- Ball bearing
- Permanent split capacitor
- 2-Speed on 36" model
- 1-Speed on 42" model
- Permanently lubricated
- Totally enclosed

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN		WHEEL SIZE	MOTOR HP	CFM* / RPM		VELOCITY PROFILE CFM / Area Sq Ft	AMPS (HIGH)	WT. (LBS.)
		SIZE	TYPE			HIGH	LOW			
08743902	PB 30-D	30"	STANDARD	8"	1/4	4400	3800	7200 / 250	2.5	65
08744002	PBS 30-D	30"	SWIVEL	10"						70
08730402	PB 36-D	36"	STANDARD	8"	1/3	6500 / 1040	5400 / 950	11500 / 320	5.5	82
08730502	PBS 36-D	36"	SWIVEL	10"						110
08730702	PB 42-D	42"	STANDARD	10"	1/2	9,000 / 825		15000 / 340	6.0	102
08730802	PBS 42-D	42"	SWIVEL	10"						128

*Measured 2 feet from face of fan

Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

48" TPI Industrial Direct Drive Portable Blowers

Features

- Corrosion and dent proof high density polyethylene housing
- Rocker switch
- SJT type 3 conductor, 12' long cord
- Steel, 2 paddle blade
- Spiral, wire front and rear guards
- 10" wheels
- Swivel model rotates 130° in 12 1/2° increments and locks in place with a steel locking pin
- Meets OSHA standards
- 1 Year limited warranty
- Made in U.S.A.

Motor Specifications

- 1-Phase
- 3/4 HP
- Ball bearing
- Permanent split capacitor
- 120V
- 1-Speed
- Permanently lubricated
- Totally enclosed



Features

MFG CATALOG NUMBER	MFG MODEL NUMBER	SIZE	FAN TYPE	MOTOR HP	CFM* \ RPM	VELOCITY PROFILE CFM / Area Sq Ft	AMPS (HIGH)	DIMENSIONS			WT. (LBS)
								"H"	"D"	"W"	
07997802	PB 48-D-OP	48"	STANDARD	3/4	11,800 / 825	14000 / 360	10.3	58.5	29	55.5	117
07998002	PBS 48-D-OP	48"	SWIVEL	3/4	11,800 / 825	14000 / 360	10.3	----	----	----	142

*Measured 2 feet from face of fan

Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

36", 42", & 48" TPI Industrial Belt Drive Portable Blowers

12



STANDARD
MODEL



SWIVEL
MODEL

Features

- Comes in sizes 36", 42", and 48"
- Rocker switch on 120V, Single Phase models
- SJT type 3 conductor, 12' long cord on 120V, Single Phase models / no cord on dual voltage models
- Aluminum, 4 paddle blade (48" PB / PBS have steel blade)
- Spiral, wire front and rear guards
- Corrosion and dent proof high density polyethylene housing
- 8" wheels (36" model), 10" wheels (42" & 48" models)
- Swivel model rotates 130° in 12 ½° increments and locks in place with a steel locking pin
- External junction boxes on dual voltage models allow units to be wired for either voltage without removing guards
- Hazardous location models have explosion proof motors, metal housings, and external junction boxes rated for Class I, Group D and Class II, Groups E, F, & G
- Meets OSHA standards
- 1 year limited warranty
- Made in U.S.A.



CORDWRAP INCLUDED
WITH STANDARD MODEL

Motor Specifications

- 1-Speed
- Permanently lubricated
- Ball bearing

Standard Models

MOTOR LISTING	SIZE	MOTOR				CFM**	VELOCITY PROFILE	STANDARD MODEL			SWIVEL MODEL		
		TYPE	HP	RPM	AMPS		CFM / Area Sq Ft	MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)	MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)
	36"	120 V 1 PH ODP	1/2	500	8.0	6,900	14000 / 360	07964702	PB 36-B	120	07965002	PBS 36-B	145
	42"		3/4	430	11.0	10,600	17500 / 420	07964802	PB 42-B	135	07965102	PBS 42-B	160
	48"		1	390	15.0	14,400	23500 / 550	07964902	PB 48-B	155	07965202	PBS 48-B	180
	36"	240/480 V 3 PH ODP	1/2	500	2.3 / 1.1	6,900	14000 / 360	08508602	PB 36-B-3	127	08509202	PBS 36-B-3	152
	42"		3/4	430	3.3 / 1.5	10,600	17500 / 420	08508702	PB 42-B-3	143	08509302	PBS 42-B-3	168
	48"		1	390	3.4 / 1.7	14,400	23500 / 550	08508802	PB 48-B-3	164	08509402	PBS 48-B-3	189
----	36"	120/240 V 1 PH EXP	1/2	500	7.8 / 3.9	6,900	14000 / 360	08508902	PB 36-B-HL*	135	08509502	PBS 36-B-HL	160
	42"		3/4	430	10.8 / 5.4	10,600	17500 / 420	08509002	PB 42-B-HL*	150	08509602	PBS 42-B-HL	175
	48"		1	390	13.2 / 6.6	14,400	23500 / 550	08509102	PB 48-B-HL*	173	08509702	PBS 48-B-HL	198

**Measured 2 feet from face of fan *Models have no listing.

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

TPI Industrial Direct Drive Suspension Blowers

13



Features

- On-Off rocker switch
- SJT type 3 conductor, 12' long cord
- Aluminum blade
- Powder coated spiral wire front and rear guards
- Corrosion and dent proof high density polyethylene housing
- Spiral wire front and rear guards
- Meets OSHA standards
- 1 year limited warranty
- Made in U.S.A.

Motor Specifications

- 120V, 1-Phase
- Ball bearing
- Permanent split capacitor
- 2-Speed on 30" & 36" model
- 1-Speed on 42" model
- Permanently lubricated

Standard Models

SIZE	MOTOR HP	MFG CATALOG NUMBER	MFG MODEL NUMBER	CFM*		VELOCITY PROFILE	RPM HIGH	AMPS HIGH	WT. (LBS)
				HIGH	LOW	CFM / Area Sq Ft			
30"	1/4	08748802	SB 30-D	4,400	3,800	7200 / 250	1050	2.5	58
36"	1/3	08730602	SB 36-D	6,500	5,400	11500 / 320	1050	5.6	70
42"	1/2	08730902	SB 42-D	9,000		15000 / 340	825	7.9	99

*Measured 2 feet from face of fan

TPI Industrial Belt Drive Suspension Blowers



Features

- On-Off rocker switch on 120V, 1-Phase models
- SJT type 3 conductor, 12' long cord on 120V, 1 phase models
- No cord on dual voltage models
- Aluminum blade
- Powder coated front and rear guards
- Corrosion and dent proof high density polyethylene housing
- Powder coated spiral wire front and rear guards
- Meets OSHA standards
- 1 year limited warranty
- Mounting chain not included.
- Made in U.S.A.

Motor Specifications

- 120V, 1-Phase
- Ball bearing
- Permanent split capacitor
- 2-Speed on 30" & 36" model
- 1-Speed on 42" model
- Permanently lubricated

External junction boxes on dual voltage models allow units to be wired for either voltage without removing guards. Hazardous Location models have explosion proof motors and external junction boxes rated for Class I, Group D, & Class II, Groups E, F & G., (Metal housing and no switch.)

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	SIZE	MOTOR		CFM**	VELOCITY PROFILE	RPM	AMPS	WT. (LBS)
			TYPE	HP		CFM / Area Sq Ft			
07965502	SB 36-B	36"	115 V	1/2	6,900	14000 / 360	500	8	120
07965602	SB 42-B	42"	1 PH	3/4	10,600	17500 / 420	430	11	135
07965702	SB 48-B	48"	ODP	1	14,400	23500 / 550	390	15	155
08509802	SB 36-B-3	36"	230 / 460 V	1/2	6,900	14000 / 360	500	2.3 / 1.1	127
08509902	SB 42-B-3	42"	3 PH	3/4	10,600	17500 / 420	430	3.3 / 1.5	143
08510002	SB 48-B-3	48"	ODP	1	14,400	23500 / 550	390	3.8 / 1.9	164
08510102	SB 36-B-HL*	36"	115 / 230 V	1/2	6,900	14000 / 360	500	7.8 / 3.9	135
08510202	SB 42-B-HL*	42"	1 PH	3/4	10,600	17500 / 420	430	10.8 / 5.4	150
08510302	SB 48-B-HL*	48"	EXP	1	14,400	23500 / 550	390	13.2 / 6.6	173

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.
Note: Photograph is a representation of stocked models. Actual model may vary slightly in appearance.

*Models have no listing.
**Measured 2 feet from face of fan

TPI Industrial Heavy Duty Direct Drive Blowers

14



Features

- Totally enclosed and explosion proof motors
- Explosion proof motors are Class 1, Div 1, Group D and Class 2, Div 1, Groups F & G
- Cast Aluminum props
- 14 gauge steel body and stand
- Acid resistant coating available
- Baked enamel coating
- 360° Swivel on high and medium stand units
- Meets federal OSHA requirements
- 1 year limited warranty

NOTE:

Single phase motors are field convertible 115V / 230V

Three phase motors are field convertible 230V / 460V

Motors are set to lower voltage at the factory unless a request is made at time of order to set to the higher voltage

Standard Models

SIZE	MFG MODEL NUMBER	HP	RPM	CFM	DB's @ 10'	WT. (LBS)		
						STAND		
						LOW	MED	HIGH
MODEL NUMBER SUFFIXES								
18"	MCD18-1/4	1/4	1725	3050	74	103	145	210
	MCD18-1/3	1/3	1725	3450	76	105	150	215
	MCD18-1	1	1725	4600	77	117	165	230
24"	MCD24-1/4	1/4	1725	5200	80	115	165	230
	MCD24-1/3	1/3	1140	5300	74	126	175	250
	MCD24-1/2	1/2	1725	6000	80	120	170	240
	MCD24-3/4	3/4	1140	6900	74	140	190	260
	MCD24-1	1	1725	7400	82	130	180	250
	MCD24-1 1/2	1.5	1725	8200	84	137	190	255
	MCD24-3	3	1725	10500	87	160	210	270
30"	MCD30-1/3	1/3	1140	6900	80	150	205	260
	MCD30-1/2	1/2	1725	8900	86	141	195	250
	MCD30-3/4	3/4	1140	10400	80	210	260	320
	MCD30-1	1	1140	11200	81	200	260	310
	MCD30-1 1/2	1.5	1725	12000	92	200	250	310
	MCD30-2	2	1140	14000	84	225	270	330
	MCD30-3	3	1725	16000	94	220	265	325
36"	MCD36-1	1	1140	13000	82	250	320	375
	MCD36-1 1/2	1.5	1725	14850	88	250	320	375
	MCD36-2	2	1140	17500	82	255	325	380
	MCD36-3	3	1725	18500	90	260	330	390
	MCD36-5	5	1725	23000	94	260	330	390
42"	MCD42-2	2	1140	19500	85	315	415	565
	MCD42-5	5	1725	27000	98	320	420	570
48"	MCD48-5	5	1140	32000	92	500	620	710
	MCD48-7 1/2	7.5	1140	37000	105	625	745	835
	MCD48-10	10	1140	41000	105	682	800	890
60"	MCD60-3	3	690	35000	87	690	855	965
	MCD60-5	5	690	45000	87	730	895	1005
	MCD60-7 1/2	7.5	870	47000	90	945	1110	1220
	MCD60-10	10	870	57200	91	1035	1200	1310
	MCD60-15	15	870	60750	92	1080	1245	1355

Manual Starter Switches

MFG MODEL NUMBER		H.P. RATING
1 PH	3 PH	
SW-1/4	SW-1/4-3	1/4-1/3
SW-1/2	SW-1/2-3	1/2-3/4
SW-1	SW-1-3	1
SW-1 1/2	SW-1 1/2-3	1.5
-----	SW-2-3	2
-----	SW-3-3	3
-----	SW-5-3	5
-----	SW-7 1/2-3	7.5

Polyolifin Casters

MFG MODEL NUMBER	FAN SIZE	WHEEL SIZE	WT. (LBS)
CAS - 18	18" - 30"	4"	10
CAS - 48	36" - 48"	5"	14

(FOR LOW & MEDIUM STAND)
4 CASTERS - 2 LOCKING

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

TPI Industrial Heavy Duty Permanent Mount Direct Drive Blowers

15

Features



1-WAY
SWIVEL



2-WAY
SWIVEL

- Front and rear spiral guards
- Explosion proof motors are Class 1, Div 1, Group D and Class 2, Div 1, Groups F & G
- Cast aluminum props
- 14 gauge steel body and stand
- Meets federal OSHA requirements
- 1 year limited warranty

NOTE:

Single Phase motors are field convertible 115V / 230V

Three Phase motors are field convertible 230V / 460V

Motors are set to lower voltage at the factory unless a request is made at time of order to set to the higher voltage

Standard Models

BLADE SIZE	MFG MODEL NUMBER	HP	RPM	CFM	DB'S @ 10'	WT. (LBS)	
						1-WAY SWIVEL	2-WAY SWIVEL
	MODEL NUMBER SUFFIXES						
18"	MCD18-1/4	1/4	1725	3050	74	130	140
	MCD18-1/3	1/3	1725	3450	76	135	145
	MCD18-1	1	1725	4600	77	145	155
24"	MCD24-1/4	1/4	1725	5200	80	145	155
	MCD24-1/3	1/3	1140	5300	74	155	165
	MCD24-1/2	1/2	1725	6000	80	150	160
	MCD24-3/4	3/4	1140	6900	74	170	180
	MCD24-1	1	1725	7400	82	160	170
	MCD24-1 1/2	1.5	1725	8200	84	165	175
	MCD24-3	3	1725	10500	87	190	200
30"	MCD30-1/3	1/3	1140	6900	80	180	190
	MCD30-1/2	1/2	1725	8900	86	170	180
	MCD30-3/4	3/4	1140	10400	80	240	250
	MCD30-1	1	1140	11200	81	230	240
	MCD30-1 1/2	1.5	1725	12000	92	230	240
	MCD30-2	2	1140	14000	84	255	265
	MCD30-3	3	1725	16000	94	250	260
36"	MCD36-1	1	1140	13000	82	295	305
	MCD36-1 1/2	1.5	1725	14850	88	295	305
	MCD36-2	2	1140	17500	82	300	310
	MCD36-3	3	1725	18500	90	315	325
	MCD36-5	5	1725	23000	94	305	315

Exhaust Ventilation Guide

Minute air change chart for
Commercial and Industrial Applications.

CFM Required for Ventilation = $\frac{\text{Building Cubic Feet}}{\text{Minutes Per Air Change}}$

Place	Typical	Range
Assembly	(6)	2-10
Auditoriums	(6)	1-20
Bakeries	(2)	1-3
Banks	(6)	3-10
Bars	(4)	2-5
Barns	(15)	10-20
Boiler Rooms	(2)	1-3
Bowling Alley	(3)	1-5
Cafeteria	(4)	3-5
Churches	(6)	2-10
Classrooms	(6)	4-8
Compressor Rooms	(2)	1-3
Dance Halls	(6)	2-10
Dairies	(4)	2-5
Dormitories	(6)	4-8
Dry Cleaning Plant	(3)	1-5

Place	Typical	Range
Engine Rooms	(3)	1-5
Factories	(7)	4-10
Foundries	(5)	2-8
Garages	(7)	4-10
Generating Plants	(4)	2-5
Glass Plants	(2)	1-3
Gymnasiums	(6)	2-10
Hallways	(8)	4-12
Kitchens (Comm.)	(3)	1-5
Laboratories	(3)	1-5
Libraries	(4)	2-5
Laundries	(2)	1-3
Locker Rooms	(6)	2-10
Machine Shops	(4)	2-5
Markets	(6)	2-10

Place	Typical	Range
Mills	(4)	2-5
Packing Houses	(4)	3-5
Plants	(7)	4-10
Plating Plants	(4)	2-5
Print Shops	(7)	4-10
Restaurants	(6)	2-10
Rest Rooms	(7)	4-10
Schools	(7)	4-10
Stores	(7)	4-10
Theaters	(6)	4-8
Transformer Rooms	(3)	1-5
Turbine Rooms	(4)	2-5
Waiting Rooms	(12)	10-15
Warehouses	(7)	4-10
Welding Rooms	(3)	1-4

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

TPI Industrial Mini-Blowers

TOTALLY ENCLOSED MOTOR ALLOWS MINI-BLOWER TO BE USED IN DIRTY OR DUSTY ENVIRONMENTS.

AVAILABLE AS FLOOR MODEL OR YOKE MOUNTED MODEL THAT CAN BE DIRECTLY BOLTED TO ANY SURFACE OR USED WITH OPTIONAL WALL/CEILING MOUNT.

Features

- Floor models have rotary switch
- Yoke mounted models have pull chain switch
- SJT type 3 conductor, 10' long cord
- Aluminum blade
- Spiral, wire front and rear guards
- Corrosion and dent proof high density polyethylene housing
- Meets OSHA standards
- 1 year limited warranty
- Made in U.S.A. with domestic and foreign components.

Motor Specifications

- 1-Phase
- 1/4 HP
- Ball bearing
- Totally enclosed
- 120V
- 2-Speed
- Permanently lubricated
- Permanent split capacitor

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN		CFM* / RPM		VELOCITY PROFILE CFM / Area Sq Ft	DIMENSIONS			AMPS (High)	WT. (LBS)
		TYPE	SIZE	HIGH	LOW		"H"	"W"	"D"		
08743502	MB 24-DF	FLOOR STYLE	24"	3300 / 1140	2900 / 1070	5200 / 240	29 ½"	28 ½"	14 ¼"	2.2	52
08743602	MB 24-DY	YOKE STYLE		29"	28 ½"		14 ¼"	52			
08743702	MB 30-DF	FLOOR STYLE	30"	4400 / 1040	3900 / 730	7000 / 250	38 ½"	37 ½"	14 ½"	2.5	58
08743802	MB 30-DY	YOKE STYLE		38"	37 ½"		14 ½"	58			
07989002	MBM-W	OPTIONAL WALL/CEILING MOUNT FOR YOKE STYLE MINI-BLOWER									4

*Measured 2 feet from face of fan



FLOOR
MODEL



MBM-W
(optional wall/ceiling mount)



YOKE MOUNTED
MODEL

TPI Industrial Heavy Duty Square Belt Drive Portable Blowers

Features

- On-Off rocker switch
- SJT type 3 conductor, 12' long cord
- Aluminum blade
- Permanently lubricated bearings on blade drive shaft
- Powder coated front and rear guards
- Powder coated 20 gauge venturi
- 18 gauge galvanized steel housing
- Meets OSHA standards / 1 Year limited warranty
- Made in U.S.A.

Motor Specifications

- 1-Phase
- Ball bearing
- Drip proof motor
- 120V
- 1-Speed
- 1/2" Shaft
- Permanently lubricated



4" CASTERS

Standard Models

SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR			CFM*	VELOCITY PROFILE CFM / Area Sq Ft	DIMENSIONS			WT. (LBS)
			HP	RPM	AMPS			"H"	"W"	"D"	
36"	08683602	PCBT 36-B	1/2	500	8.0	6,900	14,000 / 360	48 1/4"	28 1/4"	22 1/2"	120
42"	08683702	PCBT 42-B	3/4	430	11.0	10,600	17,500 / 420	56 1/2"	34 1/4"	22 1/2"	140
48"	08683802	PCBT 48-B	1	390	15.0	14,400	23,500 / 550	62 1/2"	40 1/4"	18 1/2"	185

*Measured 2 feet from face of fan

Industrial Workstation Floor Fans

17



HIGH STAND

FLOOR MODEL



Features

- Rotary switch
- Head tilts 360°
- Coated steel guards
- SJT type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Meets OSHA standards
- 1 Year limited warranty
- Imported to TPI specifications.

Motor Specifications

- Sleeve bearing
- Totally enclosed
- 1-Phase, 120V
- 3-Speed
- Permanently lubricated
- Frame size: 42
- 5/16" Shaft


Standard Models

SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN TYPE	MOTOR HP	CFM** / RPM			VELOCITY PROFILE CFM / Area Sq Ft	DIMENSIONS			MAX AMPS	WT. (LBS)
					HIGH	MED	LOW		"H"	"W"	"D"		
12"	07986102	F-12-TE	FLOOR MODEL	1/12	900 / 1590	800 / 1380	700 / 1080	1400 / 50	15 1/4"	14 1/2"	9 1/2"	1.1	13
18"	07972902	F-18-TE		1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	20 1/2"	20 1/2"	10 1/2"	1.5	20
24"	08528502	F-24-TE		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	26"	26"	10 1/2"	2.4	23
18"	07973002	F-18H-TE*	HIGH STAND	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	53"	25"	27"	2.2	27
24"	08540602	F-24H-TE*		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	53"	30"	27"	2.4	30

**Measured 2 feet from face of fan

*Made in U.S.A. with domestic and foreign components.

Corrosion Resistant Industrial Workstation Fans

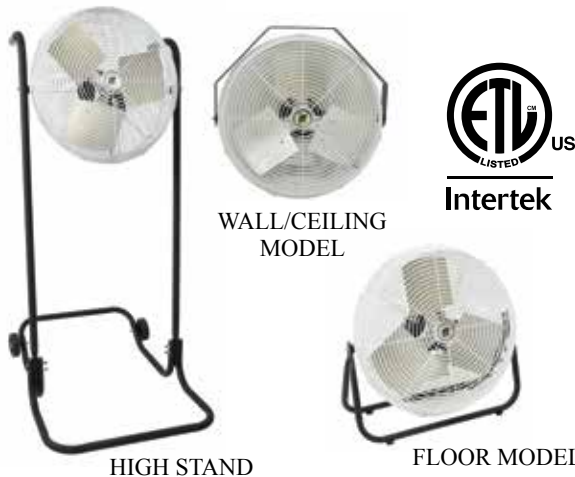

HIGH STAND

FLOOR MODEL

WALL/CEILING MODEL



Features

- Pull chain switch
- Head tilts 360°
- FDA white coated steel guards
- SJTW type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Corrosion resistant motor and switch
- Meets OSHA standards / 1 Year limited warranty
- Made in U.S.A. with domestic and foreign components.

Motor Specifications

- Sleeve bearing
- Totally enclosed
- 1-Phase, 120V
- 3-Speed
- Permanently lubricated
- Frame size: 42
- 1/2" Shaft
- Sealed electrical enclosure

Standard Models

SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN TYPE	MOTOR HP	CFM* / RPM			VELOCITY PROFILE CFM / Area Sq Ft	DIMENSIONS			MAX AMPS	WT. (LBS)
					HIGH	MED	LOW		"H"	"W"	"D"		
18"	08763202	F-18-CR	FLOOR MODEL	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	20 1/2"	20 1/2"	10 1/2"	1.5	20
24"	08763502	F-24-CR		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	26"	26"	10 1/2"	2.4	23
18"	08763302	F-18H-CR	HIGH STAND	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	53"	25"	27"	2.2	27
24"	08763602	F-24H-CR		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	53"	30"	27"	2.4	30
18"	08763102	U-18-CR	WALL/CEILING MODEL	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	21 1/2"	20 1/2"	10 1/2"	2.2	20
24"	08763402	U-24-CR		1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	27"	26"	10 1/2"	2.4	23

*Measured 2 feet from face of fan

Industrial Mounted Workstation Fans

18



FAN SIZE	DIMENSIONS		
	"H"	"W"	"D"
12"	15 1/4"	14 1/2"	9 1/2"
18"	21 1/2"	20 1/2"	10 1/2"
24"	27"	26"	10 1/2"

Features

- Pull chain switch
- Head rotates 360° vertically and horizontally
- Coated steel guards
- SJT type 3 conductor, 10' long cord
- Steel hub/spider aluminum paddle blades
- Meets OSHA standards / 1 Year limited warranty
- Imported to TPI specifications

Motor Specifications

- Sleeve bearing
- Totally enclosed, permanently lubricated
- Frame size: 42
- 3-Speed
- 1-Phase, 120V
- 5/16" Shaft

Standard Models

Pipe Mount Adaptor

FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	CFM* / RPM			VELOCITY PROFILE CFM / Area Sq Ft	MAX AMPS	WT. (LBS)
				HIGH	MED	LOW			
12"	07986002	U-12-TE	1/12	900 / 1590	800 / 1380	700 / 1080	1400 / 50	1.1	13
18"	07972802	U-18-TE	1/8	1800 / 1660	1500 / 1550	1300 / 1370	2900 / 125	2.2	20
24"	08540702	U-24-TE	1/8	2100 / 1634	1900 / 1484	1600 / 1200	3500 / 150	2.4	23

PIPE DIAMETER	MFG CATALOG NUMBER	MFG MODEL NUMBER
1"	08512402	PM-1
1 1/2"	08512502	PM-1.5
2"	08512602	PM-2
2 1/2"	08512702	PM-2.5
3"	08512802	PM-3

*Measured 2 feet from face of fan

Note: Mount with one bolt or lag screw to walls, ceilings, work benches, machines or any surface.

TPI Commercial Floor Fans



CF-20

Features

- Rotary switch
- SJT type cord - 3 conductor - 7' long
- Aluminum blade
- Coated steel guards with retaining clips
- Meets OSHA standards / 1 Year limited warranty
- Imported to TPI specifications



Motor Specification

- 3-Speed
- 120V
- Sleeve bearing
- 1-Phase
- Open ventilated
- Permanently lubricated

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	SIZE	TYPE	MOTOR HP	CFM			MAX AMPS	WT. (LBS)
					HIGH	MED	LOW		
08723002	CF-12	12"	FLOOR	1/12	1050	875	750	0.6	10
08723102	CF-18	18"	FLOOR	1/5	1600	1480	1380	1.4	16
08706502	CF-20	20"	FLOOR	1/5	1725	1600	1480	1.9	18

Units should be used in clean, dry, commercial applications.

Note: Photograph is a representation of stocked models. Actual model may vary in appearance.

Workstation Oscillating Office Fans



STAND FAN

DESK FAN



Features

- 3-speed oscillating fans with push button controls
- 3 conductor SPT cord & plug
- White powder coated wire mesh guards
- White plastic housing and blade
- Stand fan extends to 40" height
- Meets OSHA standards / 1 Year limited warranty
- Imported to TPI specifications

Standard Models

SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN TYPE	SPEEDS	CFM HIGH	AMPS HIGH	WT. (LBS)
12"	08513002	ODF-12	DESK	3	860	0.4	5.4
16"	08513102	ODF-16	DESK	3	1530	0.5	8.5
16"	08513202	OSF-16	STAND	3	1530	0.5	15.5

Workstation Wall Mount Fan With Pivoting Arm

18" HIGH VELOCITY FAN MOUNTED ON 24", 40", or 60" PIVOTING ARMS

19



Mounting Arm Features

- 1 1/2" square, 14 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Dual electrical outlets embedded in arm to allow connection of modular fan and optional light
- Made in U.S.A. with domestic and foreign components.

Modular Fan Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1-Phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards / Aluminum blades
- Meets OSHA standards / 1 year limited warranty

Use on loading docks to cool off workers entering hot truck trailers.

Use at factory workstations to cool off people or the machines.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN SIZE	ARM LENGTH	FAN CFM*			VELOCITY PROFILE	MAX AMPS	WT. (LBS)
				HIGH	MED	LOW	CFM / Area Sq Ft		
08009102	24-LDF-TE	18"	24"	1800	1500	1300	2900 / 125	2.2	31
08009202	40-LDF-TE	18"	40"						38
08009302	60-LDF-TE	18"	60"						44

*Measured 2 feet from face of fan

Optional Modular Lights



DKL-INC mounted on 40-LDF-TE (above)

Light Features

- Plugs into embedded outlet in arm
- On/Off switch and wire guard included
- Bulb included with DKL-QH and DKL-FL
- Made in U.S.A. with domestic and foreign components.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)
04465602	DKL-INC	Incandescent	300	3,700	2,000	5
04465702	DKL-QH	Quartz Halogen	500	11,000	2,000	6
04843302	DKL-FL	Fluorescent	55	3,000	10,000	7
04708602	DKL-LED	LED	12	960	50,000	5

Low Velocity "Special Application" Workstation Fan



WALL MOUNT

BENCH MOUNT CEILING MOUNT

Features

- 12" all metal, gray powder coated fan that can be wall, ceiling or bench mounted
- Direct wire electrical connection
- Toggle switch
- Fan head tilts 90° in horizontal and vertical plane
- Meets OSHA standards / 1 year limited warranty
- Made in U.S.A. with domestic and foreign components

Standard Models

SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	CFM* / RPM		VELOCITY PROFILE	AMPS HIGH	WT. (LBS)
				HIGH	LOW	CFM / Area Sq Ft		
12"	08708902	N-12	1/12	800 / 1350	600 / 1000	1200 / 40	0.6	12

*Measured 2 feet from face of fan

Portable Workstation Evaporative Coolers

20



FRONT
Patented

Evap-Mini - Features

- Lowers temperatures up to 30°F
- Water level sight tube and sump drain
- 3/4" garden hose connection for longer running
- Durable one-piece, rust free, leak-proof molded polyethylene housing
- Environmentally friendly efficient and effective
- Cools for a fraction of the cost of air conditioning
- Cools without chemicals or refrigerants
- Long-term dependability-near maintenance-free operation
- Shipped completely assembled - ready to operate out of the box



Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	UNIT VOLTS	UNIT AMPS	CFM (2 Speed)		EFFECTIVE SQ. FT.	INTERNAL WATER (Gallons)	DIMENSIONS H x W x D (Inches)	WT. (LBS)
					HIGH	LOW				
05397802	EVAP-Mini 700	1/3	120	5.6	3000	2400	700	16	38" x 29" x 25"	113

**15°F - 25°F OF EVAPORATIVE COOLING
- PLUS -
6°F - 8°F OF WIND CHILL COOLING**

EVAPORATIVE COOLING TEMPERATURE DROPS			
AIR TEMPERATURE	RELATIVE HUMIDITY		
	10%	30%	50%
80°	-22°	-16°	-10°
90°	-25°	-18°	-12°
100°	-29°	-21°	-14°
110°	-32°	-23°	-15°

Hazardous Location - Standard Models



FRONT
Patented

Hazardous Location - Specific Features

- All switches, motors, and cord connections are sealed to prevent sparking in combustible locations
- Shipped completely assembled, ready to use
- 120/240V operation
- Manufactured in U.S.A.
- Component Rating: Class 1A, Division D for Hazardous Location



CONTROL
Patented



Hazardous Location - Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	UNIT AMPS	CFM			EFFECTIVE SQ. FT.	INTERNAL WATER (Gallons)	DIMENSIONS L x W x H (Inches)	WT. (LBS)
				HIGH	MED	LOW				
08748302	EVAP36-HAZ	1/2	13.4	9600			2500	32	32 x 62 x 67	330
08748502	EVAP48-HAZ	1	18	20000			4000	40	36 x 74 x 86	460



FRONT
Patented



FRONT
Patented



BACK
Patented

Features

- Liquid level indicator with automatic pump shut off
- When pump is deenergized, red LED indicator light is on
- Heavy duty casters
- Variable speed motors
- Built in handles for easy moving
- Two inch drain for convenient flushing and cleaning



BACK
Patented

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	EFFECTIVE SQ. FT.	CFM	VELOCITY (MPH)	INTERNAL WATER (Gallons)	FAN BLADE (Inches)	UNIT AMPS	WT. (LBS)	SPEEDS	DIMENSIONS L x W x H (Inches)
08774102	EVAP16HD	1,125	4,500	29	50	16	5.4	152	Variable	60.8 x 41.8 x 24.5
08774202	EVAP24HD	2,125	8,500	24	55	24	9.2	213	Variable	69.8 x 54.9 x 32.5
08774302	EVAP36HD	3,125	12,500	25	60	36	15	267	Variable	77 x 67 x 34.5
08774402	EVAP48HD	5,625	22,500	26	65	48	20	375	Variable	89.4 x 78.8 x 40.3

Replacement Media Pads



MFG CATALOG NUMBER	MFG MODEL NUMBER	CORRESPONDING EVAP UNITS
08775002	PADEVAP-Mini700	EVAP Mini-700
08774802	PADEVAP16HD	EVAP16HD
08774702	PADEVAP24HD	EVAP24HD
08774602	PADEVAP36HD	EVAP36HD
08774502	PADEVAP48HD	EVAP48HD

Portable 18" Self Contained Power Mister

22



PM-18C



PM-18S



PM-18FO

Note: Tank lid not included.

SELF CONTAINED MISTING SYSTEM WITH WATER PUMPED FROM A 10 GALLON TANK OR VESSEL.

Features

- Toggle Switch - fan only or fan & mist
- SJT type cord - 3 conductor - 18' long with GFCI plug
- 18" Aluminum blade
- Spiral front and rear wire guards
- Standard model - Low Pressure 85 PSI diaphragm pump
- HD model - Medium Pressure 125 PSI diaphragm pump
- Meets OSHA standards / 1 year limited warranty / Made in U.S.A.

Motor Specification

- 1-Speed, 1/8 HP
- Sleeve bearing
- Permanently lubricated
- 1-Phase, 120 Volt
- Totally enclosed
- Permanent split capacitor

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN SIZE	TYPE	MOTOR HP	CFM*	AMPS	WT. (LBS)	VELOCITY PROFILE
								CFM / Area Sq Ft
08554702	PM-18S	18"	HAND CARRY	1/10	1900	1.1	30	3100 / 140
08775702	PM-18S-HD						76	
08554702	PM-18C	18"	CART	1/10	1900	1.1	30	
08775602	PM-18C-HD						76	
08760702	NK-PM18	---	REPLACEMENT NOZZLE KIT					---

*Measured 2 feet from face of fan

18" Fan & Pump Lid for 10gal. Tank

MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)
08555202	PM-18FO	28
08775802	PM-18FO-HD	28

Industrial Ceiling Fans



Note: Photograph is a representation of stocked models. Actual model may vary in appearance.

Features

- All metal construction, white epoxy finish
- 24" down rod with safety cable
- Mounts to 3/8" diameter steel J-hook
- 18 pole (motor), 115V, 1-Phase, capacitor type, impedance protected motor with sealed ball bearings
- Imported to TPI specifications

Commercial Grade

- Assembly required
- 30" lead wires
- 1 year limited warranty

Industrial Grade

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 3 year limited warranty

Heavy Duty Grade

- Fully assembled except blade bolt down
- 3 conductor cord, 30" long with plug
- Permanently lubricated
- 6 year limited warranty

Standard Models

GRADE	MFG CATALOG NUMBER	MFG MODEL NUMBER	TYPE	SIZE	VOLTS	CFM	RPM	AMPS	WT. (LBS)
Commercial	08529602	CHR-56*	Down Draft	56"	120	7000	320	0.6	15
Industrial	07979902	IHR-48	Down Draft	48"	120	5000	320	0.53	14
Industrial	07971502	IHR-56	Down Draft	56"	120	7000	310	0.6	15
Industrial	07980002	IHR-56R*	Reversible	56"	120	7000	310	0.55	14
Industrial	08008902	IHR-56-277V*	Down Draft	56"	277	7000	310	0.3	16
Water and Dust Resistant Models									
Heavy Duty	08540802	HDHR-56WR	Down Draft	56"	120	7000	320	1.1	17
Heavy Duty	08540902	HDHR-60WR	Down Draft	60"	120	7800	320	0.8	21

* 277 volt, commercial, and reversing models have lead wires instead of cordset. 36" down rod available for additional charge.

Solid State Controls (120 & 277V Models)

MFG CATALOG NUMBER	MFG MODEL NUMBER	VOLTS	MAX AMPS	VARIABLE CONTROL KNOB	REVERSING SWITCH	MAX # OF FANS	USE WITH CEILING FAN MODEL
07976302	KBWC-13K	120	3	YES; W/3" X 5" ALUMINUM PLATE (FITS 2" X 4" OPENING)	No	1-2	CHR-56, IHR-48/56, HDHR-56/60-WR
07976402	KBWC-15	120	5			3-5	CHR-56, IHR-48/56, HDHR-56/60-WR
07994102	KBWC-110K	120	10			6-10	CHR-56, IHR-48/56, HDHR-56/60-WR
08666802	KBWC-15SK	120	5		Yes	3-5	IHR-56R
08526502	KBWC-310K	277	10		No	6-10	IHR-56-277V

Options

MFG CATALOG NUMBER	MFG MODEL NUMBER	TYPE
08512202	HR-GUARD	FOR 56" MODELS
08504202	ADD SUFFIX; "X3"	36" DOWN ROD OPTION

Shutter Mounted Direct Drive Exhaust Fans

Features

- Can be installed from inside wall
- Eliminates need for external framing and shutter
- Pull chain switch
- No Cord-Junction box provided for direct wiring
- Aluminum blade
- Steel spiral wire guards
- Made in U.S.A. with domestic and foreign components.
- See sizing chart on page15

Motor Specifications

- 120V, 1-Phase, totally enclosed, permanently lubricated
 - 1/12 HP motor is 3-Speed sleeve bearing permanent split capacitor
 - 1/8 HP motor is 3-Speed sleeve bearing permanent split capacitor
 - 1/4 HP motor is 2-Speed ball bearing permanent split capacitor
- Note: Rough-in hole size is 1/2" inch larger than fan blade size




Standard Models

FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	HP	CFM / RPM			AMPS HIGH	WT. (LBS)
				HIGH	MED	LOW		
10"	08689902	CE 10-DS	1/12	680 / 1560	540 / 1250	460 / 1080	1	11
12"	07986202	CE 12-DS	1/12	825 / 1560	710 / 1250	560 / 1080	1.1	16
14"	08690002	CE 14-DS	1/8	1520 / 1660	1400 / 1550	1250 / 1370	2	17
16"	08690102	CE 16-DS	1/8	2100 / 1660	1900 / 1550	1700 / 1370	2.1	18
18"	07986302	CE 18-DS	1/8	2300 / 1660	2100 / 1050	1850 / 1370	2.2	25
20"	08690202	CE 20-DS	1/4	2925 / 1140	-	2380 / 1070	2.3	34
24"	07986402	CE 24-DS	1/4	3400 / 1140	-	2770 / 1070	2.5	47
30"	07986502	CE 30-DS	1/4	3950 / 1140	-	3080 / 1070	2.7	54

Dimensions (Inches)

SIZE	DEPTH	DIMENSIONS		
		"A"	"B"	"C"
10"	5.81"	13.125"	10"	12.375"
12"	7.18"	15.125"	12"	14.375"
14"	7.18"	17.125"	14"	16.375"
16"	7.18"	19.125"	16"	18.250"
18"	7.18"	21.125"	18"	21.750"
20"	7.18"	23.125"	20"	23.686"
24"	7.18"	27.125"	24"	27.750"
30"	7.18"	33.125"	30"	33.750"

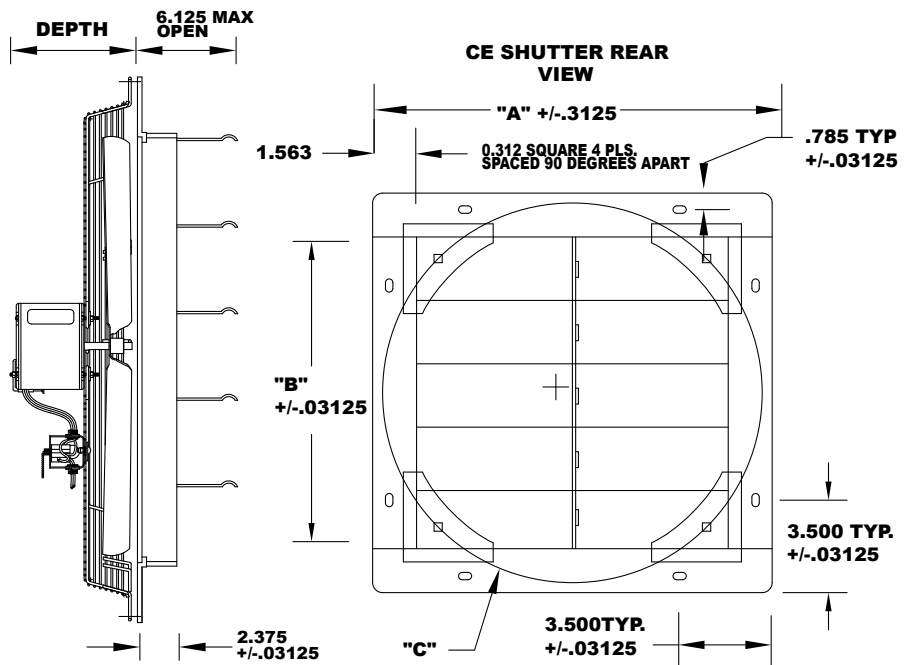

Guard Mounted Direct Drive Exhaust Fans

24

Features

- Bolts directly to the wall
 - Can be used with or without external shutter
 - Pull chain switch
 - No Cord-Junction box provided for direct wiring
 - Aluminum blade
 - Steel spiral wire guards
 - Made in U.S.A. with domestic and foreign components.
- Note: Rough-in hole size is 1/2" inch larger than fan blade size

Motor Specifications

- 120V, 1-Phase, totally enclosed, permanently lubricated
- 1/12 HP motor is 3-Speed sleeve bearing permanent split capacitor
- 1/8 HP motor is 3-Speed sleeve bearing permanent split capacitor
- 1/4 HP motor is 2-Speed ball bearing permanent split capacitor




Standard Models

FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	HP	CFM / RPM			AMPS HIGH	WT. (LBS)
				HIGH	MED	LOW		
10"	08689502	CE 10-D	1/12	680 / 1560	540 / 1250	460 / 1080	1	11
12"	07985002	CE 12-D	1/12	825 / 1560	710 / 1250	560 / 1080	1.1	12
14"	08689602	CE 14-D	1/8	1520 / 1660	1400 / 1550	1250 / 1370	2	17
16"	08689702	CE 16-D	1/8	2100 / 1660	1900 / 1550	1700 / 1370	2.1	18
18"	07984902	CE 18-D	1/8	2300 / 1660	2100 / 1050	1850 / 1370	2.2	19
20"	08689802	CE 20-D	1/4	2925 / 1140	-	2380 / 1070	2.3	34
24"	07984802	CE 24-D	1/4	3400 / 1140	-	2770 / 1070	2.5	38
30"	07984702	CE 30-D	1/4	3950 / 1140	-	3080 / 1070	2.7	42

Dimensions (Inches)

SIZE	BOLT HOLE CENTER WIDTH	DEPTH
10"	14.14"	5.81"
12"	16.46"	7.18"
14"	18.30"	7.18"
16"	20.34"	7.18"
18"	22.64"	7.18"
20"	25.46"	7.18"
24"	29.08"	7.18"
30"	34.89"	7.18"

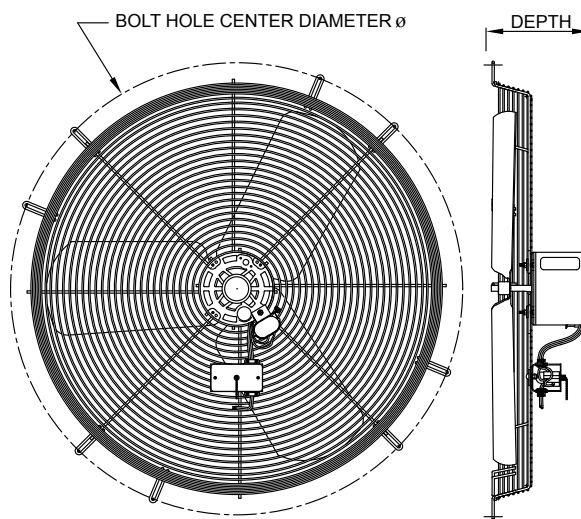

Optional Wall Shutters

FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)
10"	08684302	CES-10G	5
12"	07985502	CES-12G	5.5
14"	08684502	CES-14G	6.5
16"	08514702	CES-16G	8
18"	07985602	CES-18G	9
20"	07975202	CES-20G	10
24"	07985702	CES-24G	13
30"	07985802	CES-30G	19

Venturi Mounted Direct Drive Exhaust Fans

Features

- Can be installed from inside wall
- Can be used with external shutter
- Pull chain switch
- No Cord-Junction box provided for direct wiring
- Aluminum blade
- Steel spiral wire guards
- Made in U.S.A. with domestic and foreign components.

Motor Specifications

- 120V, 1-Phase, totally enclosed, permanently lubricated
 - 1/12 HP motor is 3-Speed sleeve bearing permanent split capacitor
 - 1/8 HP motor is 3-Speed sleeve bearing permanent split capacitor
 - 1/4 HP motor is 2-Speed ball bearing permanent split capacitor
- Note: Rough-in hole size is 1/2" inch larger than fan blade size




Standard Models

FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	HP	CFM / RPM			AMPS HIGH	WT. (LBS)
				HIGH	MED	LOW		
10"	08690302	CE 10-DV	1/12	680 / 1560	540 / 1250	460 / 1080	1	11
12"	07986602	CE 12-DV	1/12	825 / 1560	710 / 1250	560 / 1080	1.1	17
14"	08690402	CE 14-DV	1/8	1520 / 1660	1400 / 1550	1250 / 1370	2	17
16"	08690502	CE 16-DV	1/8	2100 / 1660	1900 / 1550	1700 / 1370	2.1	18
18"	07986702	CE 18-DV	1/8	2300 / 1660	2100 / 1050	1850 / 1370	2.2	26
20"	08690602	CE 20-DV	1/4	2925 / 1140	-	2380 / 1070	2.3	34
24"	07986802	CE 24-DV	1/4	3400 / 1140	-	2770 / 1070	2.5	48
30"	07986902	CE 30-DV	1/4	3950 / 1140	-	3080 / 1070	2.7	55

Dimensions (Inches)

SIZE	DEPTH	DIMENSIONS				
		"A"	"B"	"C"	"D"	"E"
10"	5.81"	10.250"	12.63"	12.375"	2.000"	12.875"
12"	7.18"	12.250"	14.50"	14.375"	2.000"	14.625"
14"	7.18"	14.250"	17.13"	16.375"	2.500"	17.375"
16"	7.18"	16.250"	19.13"	18.250"	2.875"	20.000"
18"	7.18"	18.125"	21.00"	21.750"	2.750"	22.875"
20"	7.18"	20.250"	23.13"	23.686"	2.750"	25.625"
24"	7.18"	24.250"	29.50"	27.750"	2.875"	27.875"
30"	7.18"	30.250"	33.50"	33.750"	2.875"	33.875"

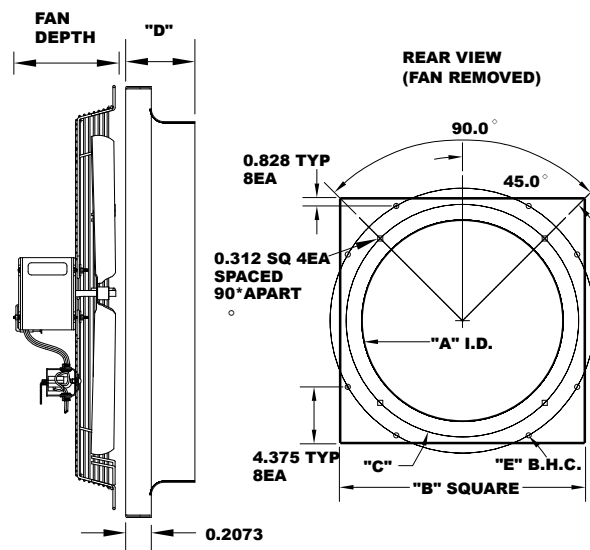

Optional Wall Shutters

FAN SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	DIMENSIONS		WT. (LBS)
			WIDTH	LENGTH	
10"	08684302	CES-10G	13.13"	13.13"	5.0
12"	07985502	CES-12G	15.13"	15.13"	5.5
14"	08684502	CES-14G	17.13"	17.13"	6.5
16"	08514702	CES-16G	19.00"	19.00"	8.0
18"	07985602	CES-18G	21.13"	21.13"	9.0
20"	07975202	CES-20G	23.13"	23.13"	10.0
24"	07985702	CES-24G	27.13"	27.13"	13.0
30"	07985802	CES-30G	33.13"	33.13"	19.0

Commercial Exhaust Fans & Shutters

26



Belt-Drive Exhaust Fan

Features

- 120V, 1 phase or 230 / 460V, 3-Phase, ball bearing, permanently lubricated, drip proof motor
- Permanently lubricated bearings on blade drive shaft
- Aluminum blade
- Powder coated venturi
- 1725 RPM • Motor frame size 56 • $\frac{5}{8}$ " shaft
- 1 year warranty
- Made in U.S.A.



Dimensions (Inches)



MODEL	DIMENSIONS A x B x C x D
CE-24B	29.5" x 28" x .75" x 17"
CE-30B	35.5" x 34" x .75" x 17"
CE-36B	41.5" x 40" x .75" x 17"
CE-42B	48" x 48" x .75" x 17"
CE-48B	54" x 54" x .75" x 17"

Standard Models

SIZE	MOTOR HP	AMPS		CFM	WT. (LBS)	115V 1-PHASE		230/460V 3-PHASE	
		115V	230/460V			MFG CATALOG NUMBER	MFG MODEL NUMBER	MFG CATALOG NUMBER	MFG MODEL NUMBER
24	1/3	5	1.9 / .9	3000	50	07967002	CE-24B	08510402	CE-24B-3
30	1/3	6	1.9 / .9	4500	60	07967102	CE-30B	08510502	CE-30B-3
36	1/2	8	2.3 / 1.1	6900	65	07967202	CE-36B	08510602	CE-36B-3
42	3/4	11	3.3 / 1.5	10600	75	07967302	CE-42B	08510702	CE-42-B-3
48	1	15	3.8 / 1.9	14400	98	07967402	CE-48B	08510802	CE-48-B-3

Optional Exhaust Shutters




Features

- Air open - gravity close
- Aluminum frame
- Aluminum blade
- Weather stripping for tighter seal
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	WT. (LBS)
07967502	CES-24	11
07967602	CES-30	15
07967702	CES-36	19
07967802	CES-42	23
07967902	CES-48	28

Shutter Dimensions (Inches)



- (A) Thickness
(B) Blade Housing Size
(C) Overall Size

MFG MODEL NUMBER	OUTSIDE FRAME DIMENSIONS A x C x C	INSIDE FRAME DIMENSIONS B x B
CES-24	3" x 27" x 27"	24" x 24"
CES-30	3" x 33" x 33"	30" x 30"
CES-36	3" x 39" x 39"	36" x 36"
CES-42	3" x 45" x 45"	42" x 42"
CES-48	3" x 51" x 51"	48" x 48"

* Recommend adding 1/2" to inside frame dimension for wall opening.

Industrial Direct Drive Exhaust Fans

Features

- Totally enclosed motors:
 - 1-Phase motors are field convertible 115V / 230V
 - 3-Phase motors are field convertible 230V / 460V
 - Motors are set to lower voltage at the factory, unless a request is made at time of order to set to the higher voltage
- 14 gauge steel venturi with steel pipe bracing
- 4-blade steel propeller
- 1 year limited warranty

Options

- CES Shutters
- EMF Front Guards
- IBG Rear Guards



Standard Models

BLADE SIZE	MFG MODEL NUMBER		PANEL SIZE (Sq.)	HP	RPM	CFM 0" SP	db's @ 10'	WT. (LBS)
	1-PHASE	3-PHASE						
	115/230V-60Hz	230/460v-60Hz						
12"	IED12-1/4	IED12-1/4-3	16"	1/4	1725	1480	64	30
16"	IED16-1/3	IED16-1/3-3	20"	1/3	1725	2834	73	40
18"	IED18-1/2	IED18-1/2-3	24"	1/2	1725	3890	74	55
20"	IED20-3/4	IED20-3/4-3	24"	3/4	1725	4574	77	65
24"	IED24-1	IED24-1-3	30"	1	1725	6632	81	155
30"	IED30-1	IED30-1-3	36"	1	1150	8600	79	185
36"	IED36-1 1/2	IED36-1 1/2-3	42"	1.5	1150	12103	82	260
42"	-----	IED42-2-3	48"	2	1150	17315	87	280
48"	-----	IED48-3-3	54"	3	850	24280	86	360

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Dimensions

SIZE	BLADE DIAMETER	PANEL SIZE	DEPTH DIMENSION
12"	12"	16"	11"
16"	16"	20"	11"
20"	20"	24"	13"
24"	24"	30"	15"
30"	30"	36"	15"
36"	36"	42"	18"
42"	42"	48"	18"
48"	48"	54"	20"

Note: Depth dimension varies with motor selection.

Industrial Belt Drive Exhaust Fans

28

Features

- Totally enclosed motors:
 - 1-Phase motors are field convertible 115V / 230V
 - 3-Phase motors are field convertible 230V / 460V
 - Motors are set to lower voltage at the factory, unless a request is made at time of order to set to the higher voltage
- 16 gauge steel venturi with steel pipe bracing
- Steel blades
- Double pillow block bearing shaft support
- 1 year limited warranty

Options

- CES Shutters
- EMF Front Guard
- IBG Rear Guards



Standard Models

BLADE SIZE	MFG MODEL NUMBER		PANEL SIZE (Sq.)	HP	RPM	CFM	db's @ 10'	WT. (LBS)
	1-PHASE	3-PHASE						
	115/230V-60Hz	230/460v-60Hz						
24"	IE24-1/3	IE24-1/3-3	30"	1/3	825	5300	61	70
	IE24-1/2	IE24-1/2-3		1/2	925	6200	66	75
	IE24-3/4	IE24-3/4-3		3/4	1050	7000	71	82
	IE24-1	IE24-1-3		1	1175	7800	73	90
30"	IE30-1/3	IE30-1/3-3	36"	1/3	570	7500	62	95
	IE30-1/2	IE30-1/2-3		1/2	625	8500	64	95
	IE30-3/4	IE30-3/4-3		3/4	725	10000	66	105
	IE30-1	IE30-1-3		1	825	11000	70	115
36"	IE36-1/3	IE36-1/3-3	42"	1/3	425	9000	64	103
	IE36-1/2	IE36-1/2-3		1/2	500	10500	66	105
	IE36-3/4	IE36-3/4-3		3/4	575	11900	68	110
	IE36-1	IE36-1-3		1	650	13100	70	120
	IE36-1 1/2	IE36-1 1/2-3		1 1/2	750	15000	72	155
	IE36-2	IE36-2-3		2	830	16500	74	165
42"	IE42-3/4	IE42-3/4-3	48"	3/4	430	14000	67	175
	IE42-1	IE42-1-3		1	490	15400	69	180
	IE42-1 1/2	IE42-1 1/2-3		1 1/2	550	17200	71	185
	IE42-2	IE42-2-3		2	620	19400	74	200
	-----	IE42-3-3		3	700	22000	79	225
48"	IE48-3/4	IE48-3/4-3	54"	3/4	350	17000	70	185
	IE48-1	IE48-1-3		1	400	19100	71	190
	IE48-1 1/2	IE48-1 1/2-3		1 1/2	460	22000	72	200
	IE48-2	IE48-2-3		2	520	24000	74	250
	-----	IE48-3-3		3	590	27500	80	260
	-----	IE48-5-3		5	660	30500	83	280
60"	IE60-2	IE60-2-3	66"	2	320	31000	77	320
	-----	IE60-3-3		3	370	35000	84	330
	-----	IE60-5-3		5	420	39000	86	350

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Dimensions

SIZE	BLADE DIAMETER	PANEL SIZE	DEPTH DIMENSION
24"	24"	30"	18"
30"	30"	36"	18"
36"	36"	42"	20"
42"	42"	48"	20"
48"	48"	54"	22"
60"	60"	66"	28"

Note: Depth dimension varies with motor selection.

Heavy Duty Direct Drive Exhaust Fans

Features

- Totally enclosed and explosion proof motors.
 - Explosion proof motors are Class 1, Div 1 Group D and Class 2, Div 1, Groups F & G
- Fans are shipped completely assembled
- Cast aluminum blades
- 14 gauge steel panel with welded steel pipe bracing
- 1 year limited warranty

Options

- CES Shutters
- EMF Front Guards
- IBG Rear Guards
- Acid Resistant Coating
- Reversed Air Flow
- Flat Front Venturi



Standard Models

BLADE SIZE	MFG MODEL NUMBER		PANEL SIZE (Sq.)	HP	RPM	CFM 0" SP	db's @ 10'	WT. (LBS)
	1-PHASE	3-PHASE						
	115/230V-60Hz	230/460V-60Hz						
12"	EHD12-1/4	EHD12-1/4-3	16"	1/4	1725	1180	74	35
16"	EHD16-1/4	EHD16-1/4-3	20"	1/4	1725	2800	75	45
18"	EHD18-1/3	EHD18-1/3-3	24"	1/3	1725	3375	75	60
	EHD18-1/2	EHD18-1/2-3		1/2	1725	4150	76	60
20"	EHD20-1/4	EHD20-1/4-3		1/4	1725	3720	75	60
	EHD20-1/2	EHD20-1/2-3		1/2	1725	4800	76	65
	EHD20-1	EHD20-1-3		1	1725	6900	77	70
24"	EHD24-1/4	EHD24-1/4-3	30"	1/4	1725	5200	82	135
	EHD24-1/3	EHD24-1/3-3		1/3	1150	4975	75	145
	EHD24-1/2	EHD24-1/2-3		1/2	1725	6510	82	140
	EHD24-3/4	EHD24-3/4-3		3/4	1725	6900	83	145
	EHD24-1	EHD24-1-3		1	1725	7425	83	155
	EHD24-2	EHD24-2-3		2	1725	9525	83	165
	-----	EHD24-3-3		3	1725	10500	85	170
30"	EHD30-1/3	EHD30-1/3-3	36"	1/3	1150	6950	79	145
	EHD30-1/2	EHD30-1/2-3		1/2	1725	8980	89	135
	EHD30-3/4	EHD30-3/4-3		3/4	1150	10440	79	175
	-----	EHD30-1-3		1	870	10640	74	215
	EHD30-1 1/2	EHD30-1 1/2-3		1 1/2	1725	12000	89	165
	EHD30-2	EHD30-2-3		2	1150	14000	82	215
	-----	EHD30-3-3		3	1725	16000	89	190
36"	EHD36-1	EHD36-1-3	42"	1	1150	13600	84	225
	EHD36-2	EHD36-2-3		2	1150	17620	84	250
	-----	EHD36-3-3		3	1150	20500	85	255
	-----	EHD36-5-3		5	1725	28000	94	250
42"	-----	EHD42-1-3	48"	1	870	15800	82	300
	EHD42-2	EHD42-2-3		2	1150	17964	88	260
	-----	EHD42-3-3		3	1150	24500	88	270
	-----	EHD42-5-3		5	1150	28970	88	285
48"	-----	EHD48-3-3	54"	3	1150	28600	92	290
	-----	EHD48-5-3		5	1150	32000	94	305
	-----	EHD48-7 1/2-3		7 1/2	870	47000	92	740
60"	-----	EHD60-3-3	66"	3	1150	40000	97	700
	-----	EHD60-5-3		5	1150	45000	97	730
	-----	EHD60-10-3		10	870	57200	93	750

Single Phase motors are field convertible 115V/230V. Three phase motors are field convertible 230V/460V. Motors are set to lower voltage at the factory, unless a request is made at time of order to set to the higher voltage. Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Dimensions

SIZE	BLADE DIAMETER	PANEL SIZE	DEPTH DIMENSION
12"	12"	16"	11"
16"	16"	20"	11"
20"	20"	24"	13"
24"	24"	30"	15"
30"	30"	36"	15"
36"	36"	42"	18"
42"	42"	48"	18"
48"	48"	54"	20"
60"	60"	66"	22"

Note: Depth dimension varies with motor selection.

Heavy Duty Belt Drive Exhaust Fans

30

Features

- Totally enclosed and explosion proof motors
 - Explosion proof motors are Class 1, Div 1 Group D and Class 2, Div 1, Groups F & G
- Fans are shipped completely assembled
- Heavy gauge steel blades on TEC models
- Cast aluminum blades on EXP explosion proof models
- 14 gauge steel panel with welded steel pipe bracing
- 1 year limited warranty
- For optimum shutter efficiency, mount shutter $\frac{1}{3}$ the distance of the fan opening size. Example: 36" fan shutter would be mounted 12" from the fan blade.

Options

- CES Shutters
- EMF Front Guards
- IBG Rear Guards
- Acid Resistant Coating
- Reversed Air Flow
- Flat Front Venturi



Standard Models

BLADE SIZE	MFG MODEL NUMBER		PANEL SIZE (Sq.)	HP	RPM	CFM 0" SP	db's @ 10"	WT. (LBS)
	1-PHASE	3-PHASE						
	115/230V-60Hz	230/460v-60Hz						
24"	EHB24-1/4	EHB24-1/4-3	30"	1/4	780	4900	60	100
	EHB24-1/2	EHB24-1/2-3		1/2	980	6219	66	130
	EHB24-3/4	EHB24-3/4-3		3/4	1140	7090	71	140
	EHB24-1	EHB24-1-3		1	1250	7180	73	140
30"	EHB30-1/4	EHB30-1/4-3	36"	1/4	540	7178	61	140
	EHB30-1/3	EHB30-1/3-3		1/3	595	7909	63	150
	EHB30-1/2	EHB30-1/2-3		1/2	640	8507	64	155
	EHB30-3/4	EHB30-3/4-3		3/4	770	10235	66	165
	EHB30-1	EHB30-1-3		1	975	10668	70	170
	EHB30-1 1/2	EHB30-1 1/2-3		1 1/2	1140	12473	77	180
36"	EHB36-1/3	EHB36-1/3-3	42"	1/3	460	9113	64	160
	EHB36-1/2	EHB36-1/2-3		1/2	530	10500	66	180
	EHB36-3/4	EHB36-3/4-3		3/4	605	11985	68	200
	EHB36-1	EHB36-1-3		1	665	13174	70	200
	EHB36-1 1/2	EHB36-1 1/2-3		1 1/2	720	13660	72	210
	EHB36-2	EHB36-2-3		2	870	16554	74	215
42"	EHB42-1/3	EHB42-1/3-3	48"	1/3	335	10614	64	205
	EHB42-1/2	EHB42-1/2-3		1/2	390	12343	65	210
	EHB42-3/4	EHB42-3/4-3		3/4	435	14040	67	225
	EHB42-1	EHB42-1-3		1	490	15429	69	230
	EHB42-1 1/2	EHB42-1 1/2-3		1 1/2	550	17420	71	240
	EHB42-2	EHB42-2-3		2	725	20653	74	245
48"	----	EHB42-3-3		3	830	23645	79	250
	EHB48-1/2	EHB48-1/2-3	54"	1/2	330	15230	69	190
	EHB48-3/4	EHB48-3/4-3		3/4	370	17339	70	195
	EHB48-1	EHB48-1-3		1	410	19188	71	235
	EHB48-1 1/2	EHB48-1 1/2-3		1 1/2	465	21731	72	245
	EHB48-2	EHB48-2-3		2	520	24274	74	250
60"	----	EHB48-3-3		3	680	28150	80	270
	----	EHB48-5-3		5	800	33160	83	285
	EHB60-1	EHB60-1-3	66"	1	280	23090	76	380
	EHB60-1 1/2	EHB60-1 1/2-3		1 1/2	340	28068	77	390
	EHB60-2	EHB60-2-3		2	390	32200	78	395
	----	EHB60-3-3		3	450	37183	84	410
	----	EHB60-5-3		5	540	44600	86	420

Single Phase motors are field convertible 115V/230V. Three phase motors are field convertible 230V/460V. Motors are set to lower voltage at the factory, unless a request is made at time of order to set to the higher voltage. Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Dimensions

SIZE	BLADE DIAMETER	PANEL SIZE	DEPTH DIMENSION
24"	24"	30"	16"
30"	30"	36"	16"
36"	36"	42"	18"
42"	42"	48"	20"
48"	48"	54"	21"
60"	60"	66"	26"

Note: Depth dimension varies with motor selection.

Cabinet Exhaust Fans With Shutters

Features

- 120V, 1-Phase or 230 / 460V, 3-Phase, ball bearing, permanently lubricated, drip proof motor - UL listed
- Permanently lubricated bearings on blade drive shaft
- Aluminum blade
- Aluminum shutter
- 20 gauge powder coated venturi
- 18 gauge galvanized steel housing
- 1725 RPM motor
- Motor frame size 56 / Shaft: $\frac{5}{8}$ "
- Ships fully assembled
- Meets OSHA Standards
- 1 year warranty
- Made in U.S.A.



Standard Models

SIZE	MOTOR HP	AMPS		CFM	WT. (LBS)	115V 1-PHASE		230 / 460V 3-PHASE	
		115V	230/460V			MFG CATALOG NUMBER	MFG MODEL NUMBER	MFG CATALOG NUMBER	MFG MODEL NUMBER
24	1/3	5	1.9 / .9	3000	100	08683902	CBT-24B	08685202	CBT-24B-3
30	1/3	6	1.9 / .9	4500	120	08684002	CBT-30B	08685302	CBT-30B-3
36	1/2	8	2.3 / 1.1	6900	135	08684102	CBT-36B	08685402	CBT-36B-3
42	3/4	11	3.3 / 1.5	10600	155	08684202	CBT-42B	08685502	CBT-42B-3
48	1	15	3.8 / 1.9	14400	200	08685102	CBT-48B	08685002	CBT-48B-3

Dimensions

SIZE	OUTSIDE DIMENSIONS			MAXIMUM REQUIRED INSIDE WALL OPENING
	HEIGHT	WIDTH	DEPTH	
24"	28 $\frac{1}{4}$ "	28 $\frac{1}{4}$ "	22 $\frac{1}{2}$ "	28 $\frac{3}{4}$ " x 28 $\frac{3}{4}$ "
30"	34 $\frac{1}{4}$ "	34 $\frac{1}{4}$ "	22 $\frac{1}{2}$ "	34 $\frac{1}{2}$ " x 34 $\frac{1}{2}$ "
36"	40 $\frac{1}{4}$ "	40 $\frac{1}{4}$ "	18 $\frac{1}{2}$ "	40 $\frac{1}{2}$ " x 40 $\frac{1}{2}$ "
42"	48 $\frac{1}{2}$ "	48 $\frac{1}{2}$ "	18 $\frac{1}{2}$ "	48 $\frac{3}{4}$ " x 48 $\frac{3}{4}$ "
48"	54 $\frac{1}{2}$ "	54 $\frac{1}{2}$ "	21 $\frac{1}{2}$ "	54 $\frac{3}{4}$ " x 54 $\frac{3}{4}$ "

Exhaust Fan Accessories - Heavy Duty Exhaust Shutter

32

Features

- Air open - Gravity close
- Aluminum construction
- Heavy duty blades
- Weather stripping for tighter seal
- For optimum shutter efficiency, mount shutter $\frac{1}{3}$ the distance of the fan opening size. Example: 36" fan shutter would be mounted 12" from the fan blade.
- Shutter should be sized to fit exhaust opening

Standard Models

FAN SIZE	MFG MODEL NUMBER	INSIDE FRAME DIMENSIONS	OUTSIDE FRAME DIMENSIONS	WT. (LBS)
12"	CES-12	12" x 12"	14" x 15"	4
16"	CES-16	16" x 16"	19" x 19"	7
18"	CES-18	18" x 18"	21" x 21"	8
20"	CES-20	20" x 20"	23" x 23"	9
24"	CES-24	24" x 24"	27" x 27"	11
30"	CES-30	30" x 30"	33" x 33"	15
36"	CES-36	36" x 36"	39" x 39"	19
42"	CES-42	42" x 42"	45" x 45"	23
48"	CES-48	48" x 48"	51" x 51"	28
54"	CES-54	54" x 54"	57" x 57"	39
60"	CES-60	60" x 60"	63" x 63"	47



Heavy Duty Shutter Motor Kit Features



- Used to open shutter when shutter is used to provide make-up air (Shutter should be one size larger than exhaust fan size and should be located on opposite wall)
- Used for positive closure of exhaust shutter
- 115V or 230V, 60 HZ, 1-Phase

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	WT. (LBS)
07971002	MK-1	For shutter sizes 12" thru 30" (Single Panel)	5
07971102	MK-2	For shutter sizes 36" thru 60" (Double Panel)	8

Motorized Supply Air Intake Shutter

Features

- Inward opening blades for use with intake fans when shutter is located directly in air stream
- Galvanized construction
- 115V or 230V, 60 HZ, 1-Phase

Standard Models

FAN SIZE	MFG MODEL NUMBER	ROUGH OPENING	OVERALL SIZE	WT. (LBS)
24"	CESM-24	24" x 24"	27" x 27"	15
30"	CESM-30	30" x 30"	33" x 33"	18
36"	CESM-36	36" x 36"	39" x 39"	21
42"	CESM-42	42" x 42"	45" x 45"	35
48"	CESM-48	48" x 48"	51" x 51"	42
60"	CESM-60	60" x 60"	63" x 63"	56



Rear Box Guard Bolt Together With Wire Guards



Features

- For IE, IED, EHB and EHD models
- ¼" Smaller than the panel size of the fan
- Meets OSHA requirements

Standard Models

MFG MODEL NUMBER	FITS FAN SIZE
IBG-24	24"
IBG-30	30"
IBG-36	36"
IBG-42	42"
IBG-48	48"
IBG-60	60"

Rear Expanded Metal Box Guard




Features

- For IE, IED, EHB and EHD models
- ¼" Smaller than the panel size of the fan
- Meets OSHA requirements


Standard Models

MFG MODEL NUMBER	FITS FAN SIZE
IBG-12	12"
IBG-16	16"
IBG-18	18"
IBG-20	20"

Spiral Front and Rear Guards



Spiral Front



Spiral Rear


Features

- For EHD models only
- Fits between motor and blade
- Rear guard installed at factory only
- Meets OSHA requirements

Standard Models

MFG MODEL NUMBER	TYPE	FITS FAN SIZE
SF-12	SPIRAL FRONT	12"
SF-16		16"
SF-18		18"
SF-20		20"
SF-24		24"
SR-12	SPIRAL REAR	12"
SR-16		16"
SR-18		18"
SR-20		20"
SR-24		24"

Expanded Metal Front Guard



Expanded metal guard
60"

Features

- For EHB, EHD, IE, & IED models
- 1" Larger than blade size
- Meets OSHA requirements

Standard Models

MFG MODEL NUMBER	FITS FAN SIZE
EMF-12	12"
EMF-16	16"
EMF-20	20"
EMF-24	24"
EMF-30	30"
EMF-36	36"
EMF-42	42"
EMF-48	48"
EMF-60	60"

Cabinet Exhaust Fan Package Option

With Bolt Together Rear Guard

Package Includes

- Wall collar
- Automatic shutter
- Rear box guard

Standard Models

MFG MODEL NUMBER	FAN SIZE
CEFP-24	24"
CEFP-30	30"
CEFP-36	36"
CEFP-42	42"
CEFP-48	48"



Features

- For IE, IED, EHB and EHD models.
- Wall collar OD is 1/4" larger than fan panel size.
- Meets OSHA requirements


With Expanded Metal Rear Guard

Package Includes

- Wall collar
- Automatic shutter
- Rear box guard

Standard Models

MFG MODEL NUMBER	FAN SIZE
CEFP-12	12"
CEFP-16	16"
CEFP-18	18"
CEFP-20	20"
CEFP-60	60"

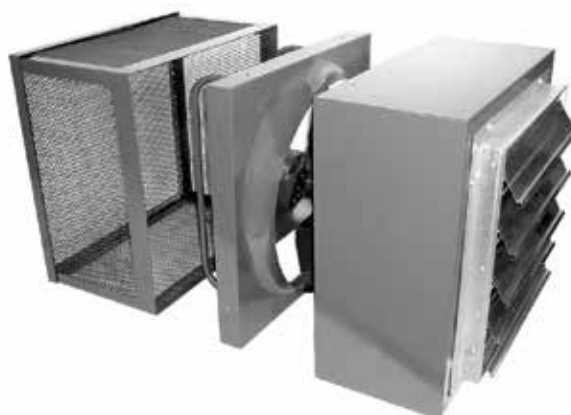

Features

- For IE, IED, EHB and EHD models.
- Wall collar OD is 1/4" larger than fan panel size.
- Meets OSHA requirements

Exterior Weather Hood Option

Features

- For IE, IED, EHB and EHD models.
- Galvanized housing with 1/2 - 16 expanded metal bird screen
- Can be used for intake or exhaust
- Meets OSHA requirements

Standard Models

MFG MODEL NUMBER	FAN SIZE
WH-12	12"
WH-16	16"
WH-18	18"
WH-20	20"
WH-24	24"
WH-30	30"
WH-36	36"
WH-42	42"
WH-48	48"
WH-60	60"



Insulated Roof Curbs

35



SLS-24

Features

- Used with UEB, UED, and RE roof ventilators
- For flat, single slope or ridge style roofs
- Galvanized steel construction
- 1 ½" insulated thickness, 3 pounds density
- 8" height overall
- Not for corrugated roofs

Standard Models

FAN	MFG MODEL NUMBER			BASE DIMENSION	OVERALL DIMENSION
	FLAT	SLOPE	RIDGE		
18"	FLS-18	SLS-18	RDS-18	32" x 32"	44" x 44"
24"	FLS-24	SLS-24	RDS-24	38" x 38"	50" x 50"
30"	FLS-30	SLS-30	RDS-30	44" x 44"	56" x 56"
36"	FLS-36	SLS-36	RDS-36	50" x 50"	62" x 62"
42"	FLS-42	SLS-42	RDS-42	56" x 56"	68" x 68"
48"	FLS-48	SLS-48	RDS-48	62" x 62"	74" x 74"
54"	FLS-54	SLS-54	RDS-54	68" x 68"	80" x 80"
60"	FLS-60	SLS-60	RDS-60	74" x 74"	86" x 86"

Back Draft Dampers to Fit in Curb

UEB and UED models require higher curb height when used with back draft damper; consult factory.

FAN SIZE	MFG MODEL NUMBER	SHUTTER SIZE
18"	CD-18	28" x 28"
24"	CD-24	34" x 34"
30"	CD-30	40" x 40"
36"	CD-36	46" x 46"
42"	CD-42	52" x 52"
48"	CD-48	58" x 58"
54"	CD-54	64" x 64"
60"	CD-60	70" x 70"

Motor Kit for Dampers

115V or 230V, 60Hz, 1-Phase. (Specify Voltage)

MFG MODEL NUMBER	DESCRIPTION	WT. (LBS)
DMKP1	For shutter sizes 18" thru 36"	5
DMKP2	For shutter sizes 42" thru 60"	8

Belt Drive Hooded Roof Ventilators

36



CLOSED



OPEN

Features

- Used for exhaust or intake
- Heavy industrial steel base with aluminum hood
- Steel blades
- Bird screen included
- No back draft protection in standard construction. Dampers offered as optional accessory.
- 1 year limited warranty

Options

- Direct drive
- Protective coatings, explosion proof.
- Roof curb
- Filters

Dimensions

SIZE	MINIMUM ROOF HOLE (SQUARE)	HOLE LENGTH x WIDTH	HOOD HEIGHT	ROOF CURB O.D. (SQUARE)
24"	30"	54" x 64"	30"	39"
30"	36"	60" x 76"	36"	45"
36"	42"	72" x 82"	40"	51"
42"	48"	80" x 89"	43"	57"
48"	54"	87" x 95"	46"	63"
54"	60"	92" x 98"	54"	69"
60"	66"	90" x 107"	56"	75"

Standard Models

BLADE SIZE	1-PHASE 115/230V	3-PHASE 230/460v	HP	RPM	C.F.M - STATIC PRESSURE				Db's @ 10'	WT. (LBS)
	MFG MODEL NUMBER				0"	1/8"	1/4"	1/2"		
24"	RE24-1/4	RE24-1/4-3	1/4	780	4900	4222	2807	800	60	340
	RE24-1/2	RE24-1/2-3	1/2	980	6219	5716	5061	2600	66	350
	RE24-3/4	RE24-3/4-3	3/4	1140	7090	6648	6144	4413	71	360
	RE24-1	RE24-1-3	1	1250	7180	6696	6271	4464	73	365
30"	RE30-1/3	RE30-1/3-3	1/3	595	7909	6380	3617	767	60	385
	RE30-1/2	RE30-1/2-3	1/2	640	8507	7170	4486	1373	64	385
	RE30-3/4	RE30-3/4-3	3/4	770	10235	9192	7657	3833	66	400
	RE30-1	RE30-1-3	1	975	10668	9959	8626	5184	70	400
	RE30-1 1/2	RE30-1 1/2-3	1.5	1140	12473	11867	11112	8135	77	410
36"	RE36-1/3	RE36-1/3-3	1/3	460	9113	6992	3722	486	64	425
	RE36-1/2	RE36-1/2-3	1/2	530	10500	8821	5985	2084	66	425
	RE36-3/4	RE36-3/4-3	3/4	605	11985	10583	8563	4017	68	435
	RE36-1	RE36-1-3	1	665	13174	11932	10299	5729	70	440
	RE36-1 1/2	RE36-1 1/2-3	1.5	720	13660	12012	9579	5000	72	440
42"	RE36-2	RE36-2-3	2	870	16554	15376	14088	9691	74	455
	RE42-1/2	RE42-1/2-3	1/2	390	12343	9352	4957	1642	65	540
	RE42-3/4	RE42-3/4-3	3/4	435	14040	11530	7633	3311	67	545
	RE42-1	RE42-1-3	1	490	15429	13194	10438	4668	69	555
	RE42-1 1/2	RE42-1 1/2-3	1.5	550	17420	15421	13117	7289	71	560
48"	RE42-2	RE42-2-3	2	725	20653	19128	17503	11319	74	570
	-----	RE42-3-3	3	830	23645	22296	20984	17290	79	585
	RE48-3/4	RE48-3/4-3	3/4	370	17339	13700	7389	2244	70	650
	RE48-1	RE48-1-3	1	410	19188	16078	10903	4037	71	660
	RE48-1 1/2	RE48-1 1/2-3	1.5	465	21731	19010	14991	7081	72	665
	RE48-2	RE48-2-3	2	520	24274	21943	19080	10125	74	680
54"	-----	RE48-3-3	3	680	28150	25683	23615	16930	80	700
	-----	RE48-5-3	5	800	33160	30900	29290	25000	83	720
	RE54-1	RE54-1-3	1	410	23130	20588	17500	9600	73	910
	RE54-1 1/2	RE54-1 1/2-3	1.5	450	25400	22600	19300	10316	75	920
	RE54-2	RE54-2-3	2	480	27200	24312	20660	11010	76	930
60"	-----	RE54-3-3	3	550	31213	28722	25830	15420	77	940
	-----	RE54-5-3	5	660	37458	35238	32893	26538	80	960
	RE60-1	RE60-1-3	1	250	23090	19161	12850	----	76	1150
	RE60-1 1/2	RE60-1 1/2-3	1.5	340	28068	23283	15624	8000	77	1150
	RE60-2	RE60-2-3	2	390	32200	26710	17924	9380	78	1200
	-----	RE60-3-3	3	450	37183	32356	25324	15013	84	1220
60"	-----	RE60-5-3	5	540	44600	41232	35819	23237	86	1240
	-----	RE60-7 1/2-3	7.5	620	50184	47603	43981	32880	89	1285

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Direct Drive Roof Ventilators



Features

- Cast Aluminum blades on most models
- Totally enclosed and explosion proof motors
- 1-Phase motors are field convertible 115V/230V
- 3-Phase motors are field convertible 230V/460V
- Motors are set to lower voltage at the factory unless a request is made at time of order to set them to the higher voltage
- Explosion proof motors are Class 1, Div 1, Group D and Class 2, Div 1, Groups F & G
- Wind band is 18 gauge galvanized steel
- Rubber shim under dampers for better seal
- Size of roof opening to be 6" larger than fan size
- Some models available with low R.P.M. motor for quieter operation
- 1 year limited warranty

Options

- Protective coating.
- Disconnect switch
- Prefabricated curbs

Standard Models

BLADE SIZE	1-PHASE 115/230V	3-PHASE 230/460v	HP	RPM	C.F.M - STATIC PRESSURE				Db's @ 10'	WT. (LBS)
	MFG MODEL NUMBER				0"	1/8"	1/4"	1/2"		
18"	UED18-1/4	UED18-1/4-3	1/4	1140	2570	2263	1673	854	66	170
	UED18-1/3	UED18-1/3-3	1/3	1725	3375	3000	2600	1400	75	175
	UED18-1/2	UED18-1/2-3	1/2	1725	4133	3938	3724	3132	76	180
	UED18-1	UED18-1-3	1	1725	4600	4375	4080	3000	77	190
24"	UED24-1/4	UED24-1/4-3	1/4	1725	5200	4200	2820	----	75	240
	UED24-3/4	UED24-3/4-3	3/4	1140	6900	6450	6265	3300	76	260
	UED24-1	UED24-1-3	1	1725	7425	7000	6350	5000	83	280
	-----	UED24-3-3	3	1725	10500	9800	9500	8700	85	295
30"	UED30-3/4	UED30-3/4-3	3/4	1140	10440	9750	8750	6000	79	310
	-----	UED30-1-3	1	870	10800	10100	9100	6360	74	330
	UED30-1 1/2	UED30-1 1/2-3	1.5	1140	10410	9686	8834	6420	81	325
	UED30-2	UED30-2-3	2	1140	14000	13750	12900	10450	82	335
	-----	UED30-3-3	3	1725	16000	15350	14700	12900	89	335
36"	UED36-2	UED36-2-3	2	1140	17620	16500	15200	12300	84	430
	-----	UED36-3-3	3	1140	20500	19500	18500	15850	85	455
	-----	UED36-5-3	5	1140	22600	21700	20500	19000	87	465
42"	UED42-2	UED42-2-3	2	1140	17964	17277	15326	12351	88	500
	-----	UED42-5-3	5	1140	28970	27960	26840	24200	89	500
48"	-----	UED48-3-3	3	1140	28600	26500	24400	20000	92	550
	-----	UED48-5-3	5	870	33000	31500	29750	25300	86	665
	-----	UED48-7 1/2-3	7.5	1140	37000	35100	32800	28000	94	740
	-----	UED48-10-3	10	1140	41000	39200	38300	35400	95	875
60"	-----	UED60-5-3	5	870	45200	41500	37000	26000	90	940
	-----	UED60-7 1/2-3	7.5	870	47000	45500	43600	38700	92	950
	-----	UED60-10-3	10	690	54000	51900	49000	43200	87	960

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Dimensions

SIZE	MINIMUM ROOF HOLE SIZE (SQUARE)	WIND BAND OUTER DIMENSION	ROOF CURB OUTER DIMENSION (SQUARE)	WIND BAND HEIGHT
18"	28"	24"	33"	16"
24"	34"	30"	39"	19"
30"	40"	36"	45"	22"
36"	46"	42"	51"	25"
42"	52"	48"	57"	27"
48"	58"	54"	63"	30"
60"	70"	66"	75"	42"

Belt Drive Roof Ventilators

38



Features

- Standard blades are heavy gauge steel
- Totally enclosed motors.
- 1-Phase motors are field convertible 115V/230V
- 3-Phase motors are field convertible 230V/460V
- Motors are set to lower voltage at factory unless a request is made at time of order to set them to the higher voltage
- Wind band is 18 gauge galvanized steel
- Galvanized steel butterfly damper with rubber stops and seals
- Size of the roof opening to be 6" larger than fan size (Wind Band O.D.) dimension
- 1 year limited warranty.

Options

- Protective coating.
- Disconnect switch
- Prefabricated curbs

Standard Models

BLADE SIZE	1-PHASE 115/230V	3-PHASE 230/460v	HP	RPM	C.F.M - STATIC PRESSURE				Db's @ 10'	WT. (LBS)
	MFG MODEL NUMBER				0"	1/8"	1/4"	1/2"		
24"	UEB24-1/3	UEB24-1/3-3	1/3	780	4900	4222	2807	800	64	300
	UEB24-1/2	UEB24-1/2-3	1/2	980	6219	5716	5661	2600	66	305
	UEB24-3/4	UEB24-3/4-3	3/4	1140	7090	6648	6144	4413	71	310
30"	UEB30-1/2	UEB30-1/2-3	1/2	640	8507	7170	4486	1373	64	350
	UEB30-3/4	UEB30-3/4-3	3/4	770	10235	9192	7657	3833	66	360
	UEB30-1	UEB30-1-3	1	975	10668	9959	8626	5184	70	370
36"	UEB36-1/2	UEB36-1/2-3	1/2	530	10500	8821	5985	2084	66	360
	UEB36-3/4	UEB36-3/4-3	3/4	605	11985	10583	8563	4017	68	370
	UEB36-1	UEB36-1-3	1	665	13174	11932	10299	5729	70	390
	UEB36-1 1/2	UEB36-1 1/2-3	1.5	720	13660	12012	9579	5000	72	395
42"	UEB42-3/4	UEB42-3/4-3	3/4	435	14040	11530	7633	3311	67	455
	UEB42-1	UEB42-1-3	1	490	15429	13194	10438	4668	69	465
	UEB42-1 1/2	UEB42-1 1/2-3	1.5	550	17420	15421	13117	7289	71	470
	UEB42-2	UEB42-2-3	2	725	20653	19128	17503	11319	74	485
	-----	UEB42-3-3	3	830	23645	22296	20984	17290	79	495
48"	UEB48-3/4	UEB48-3/4-3	3/4	370	17339	13700	7389	2244	70	505
	UEB48-1	UEB48-1-3	1	410	19188	16078	10903	4037	71	520
	UEB48-1 1/2	UEB48-1 1/2-3	1.5	465	21731	19010	14991	7081	72	535
	UEB48-2	UEB48-2-3	2	520	24274	21943	19080	10125	74	545
	-----	UEB48-3-3	3	680	28150	25683	23615	16930	80	560
54"	UEB54-1	UEB54-1-3	1	410	23130	20588	17500	9600	73	870
	UEB54-1 1/2	UEB54-1 1/2-3	1.5	450	25400	22600	19300	10316	75	880
	UEB54-2	UEB54-2-3	2	480	27200	24312	20660	11010	76	890
	-----	UEB54-3-3	3	550	31213	28722	25830	15420	80	900
	-----	UEB54-5-3	5	660	37458	35238	32843	26538	82	920
60"	UEB60-1 1/2	UEB60-1 1/2-3	1.5	340	28068	23203	15624	8000	78	940
	UEB60-2	UEB60-2-3	2	390	32200	26710	17924	9380	80	960
	-----	UEB60-3-3	3	450	37183	32356	25324	15013	84	985
	-----	UEB60-5-3	5	540	44600	41232	35819	23237	86	1000

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Dimensions

SIZE	MINIMUM ROOF HOLE SIZE (SQUARE)	WIND BAND OUTER DIMENSION	ROOF CURB OUTER DIMENSION (SQUARE)	WIND BAND HEIGHT
24"	34"	30"	39"	19"
30"	40"	36"	45"	22"
36"	46"	42"	51"	25"
42"	52"	48"	57"	27"
48"	58"	54"	63"	30"
54"	64"	60"	69"	36"
60"	70"	66"	75"	42"

Tubeaxial Direct Drive Duct Fans

39



Features

- Totally enclosed and explosion proof motors
- 1-Phase motors are field convertible 115V/230V
- 3-Phase motors are field convertible 230V/460V
- Motors are set to lower voltage at the factory unless a request is made at time of order to set them to the higher voltage
- Explosion proof motors are Class 1, Div 1, Group D and Class 2, Div 1, Groups F & G
- 14 gauge steel drum including mounting flanges
- Fan can be mounted to operate in any position
- Rugged cast aluminum blade, non-sparking
- 1 year limited warranty

Dimensions

SIZE	HOUSING INNER DIM.	HOUSING OUTER DIM.	BOLT HOLE CENTERS	HOUSING DEPTH
12"	12"	14"	13 1/8"	14"
18"	18"	20"	19 1/8"	14"
24"	24"	27"	25 3/4"	18"
27"	27"	30"	28 3/4"	18"
30"	30"	33"	31 3/4"	18"
34"	34"	37"	35 3/4"	18"
42"	42"	45"	43 9/16"	18"
48"	48"	51"	49 5/8"	18"


Options

- Companion flanges
- Protective coating
- Fan guards
- Access doors

Standard Models

BLADE SIZE	1-PHASE 115/230V	3-PHASE 230/460v	HP	RPM	BLADES	C.F.M - STATIC PRESSURE				Db's @ 10'	WT. (LBS)
	MFG MODEL NUMBER					0"	1/4"	1/2"	3/4"		
12"	TXD12-1/4	TXD12-1/4-3	1/4	1725	4	1180	520	----	----	77	40
	TXD12-1/2	TXD12-1/2-3	1/2	3450	4	1875	1400	1250	1100	82	45
	TXD12-3/4	TXD12-3/4-3	3/4	3450	6	2044	1920	1650	1500	83	45
18"	TXD18-1/4	TXD18-1/4-3	1/4	1725	4	3450	2500	----	----	74	55
	TXD18-1/3	TXD18-1/3-3	1/3	1725	6	3375	2600	1400	----	75	65
	TXD18-1/2	TXD18-1/2-3	1/2	1725	6	4150	3150	1700	----	77	65
	TXD18-1	TXD18-1-3	1	1725	6	4600	4080	3000	2100	80	70
24"	TXD24-1/4	TXD24-1/4-3	1/4	1725	2	5200	2820	----	----	80	95
	TXD24-1/3	TXD24-1/3-3	1/3	1140	6	4975	4250	2850	----	74	110
	TXD24-1/2	TXD24-1/2-3	1/2	1725	4	6510	5200	3100	1800	80	115
	TXD24-3/4	TXD24-3/4-3	3/4	1140	6	6900	6265	3300	----	74	125
	TXD24-1	TXD24-1-3	1	1725	6	7425	6350	5000	3300	82	120
	TXD24-2	TXD24-2-3	2	1725	6	9525	8810	7980	6960	84	120
	-----	TXD24-3-3	3	1725	6	10500	9500	8700	7800	86	130
27"	TXD27-1/2	TXD27-1/2-3	1/2	1725	4	7550	6000	4000	2000	86	125
	TXD27-1	TXD27-1-3	1	1725	4	9600	8400	7050	4800	86	155
	TXD27-2	TXD27-2-3	2	1725	6	11500	10700	9300	8000	86	165
30"	TXD30-1/2	TXD30-1/2-3	1/2	1725	4	8980	6300	4350	2300	86	130
	TXD30-3/4	TXD30-3/4-3	3/4	1140	6	10440	8750	6000	----	80	150
	TXD30-2	TXD30-2-3	2	1725	6	12000	10450	8700	6000	89	155
	-----	TXD30-3-3	3	1725	6	16000	14700	12900	10200	89	175
34"	TXD34-1 1/2	TXD34-1 1/2-3	1.5	1725	4	13350	10000	7300	----	88	175
	TXD34-2	TXD34-2-3	2	1725	4	14850	12100	8800	4000	89	200
	-----	TXD34-3-3	3	1140	3	19300	17230	14800	11614	86	250
	-----	TXD34-5-3	5	1725	6	21000	18900	17500	14850	91	220
36"	TXD36-2	TXD36-2-3	2	1140	6	17620	15200	12300	8500	84	210
	-----	TXD36-3-3	3	1725	4	18500	15700	13900	11500	89	230
42"	-----	TXD42-1-3	1	870	4	15800	13480	5800	900	81	270
	TXD42-2	TXD42-2-3	2	1140	4	17964	15326	12351	7600	87	260
	-----	TXD42-3-3	3	1140	4	24500	23000	19650	14000	87	260
	-----	TXD42-5-3	5	1140	4	28970	26840	24200	19500	87	300
48"	-----	TXD48-3-3	3	1140	4	28600	24400	20000	15900	94	290
	-----	TXD48-5-3	5	870	4	33000	29750	25300	18000	86	500

Duct Fan Guards



Features

- Enamel finish
- Can be used as front or rear guards. (Rear guard for TXD models must be ordered with fan)

Standard Models

FAN SIZE	MFG MODEL	FAN SIZE	MFG MODEL
12"	TXG-12	30"	TXG-30
15"	TXG-15	34"	TXG-34
18"	TXG-18	36"	TXG-36
24"	TXG-24	42"	TXG-42
27"	TXG-27	48"	TXG-48

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Tubeaxial Belt Drive Duct Fans

40



Features

- Eliminates fumes and vapors from paint spray booths and other hazardous areas
- Totally enclosed and explosion proof motors
- 1-Phase motors are field convertible 115V/230V
- 3-Phase motors are field convertible 230V/460V
- Motors are set to lower voltage at the factory unless a request is made at time of order to set them to the higher voltage
- Explosion proof motors are Class 1, Div 1, Group D and Class 2, Div 1, Groups F & G
- Recommended for most paint spray applications because motor is out of air
- 14 gauge steel drum including mounting flanges at each end
- Completely enclosed belt and ball bearing housing
- Adjustable motor base for proper belt tension
- Rugged cast aluminum blade, non-sparking
- Fan can be mounted to operate in any position
- 1 year limited warranty

Options

- Companion flanges
- Protective coating
- Access doors
- Belt guards
- Motor covers
- Fan guards

Standard Models


BLADE SIZE	1-PHASE 115/230V-60Hz	3-PHASE 230/460v-60Hz	HP	RPM	BLADES	C.F.M - STATIC PRESSURE				Db's @10'	WT (LBS)
	MFG MODEL NUMBER										
	0"	1/4"				1/2"	3/4"				
12"	TXB12-1/4	TXB12-1/4-3	1/4	2625	4	1444	1033	380	----	77	62
	TXB12-1/3	TXB12-1/3-3	1/3	2875	4	1586	1135	415	----	78	65
	TXB12-1/2	TXB12-1/2-3	1/2	3450	4	1875	1400	1250	1100	83	65
	TXB12-3/4	TXB12-3/4-3	3/4	3450	6	2044	1920	1650	1500	83	67
15"	TXB15-1/4	TXB15-1/4-3	1/4	2000	6	2600	1700		----	77	67
	TXB15-1/3	TXB15-1/3-3	1/3	2200	6	2950	2100	1000	----	78	69
	TXB15-1/2	TXB15-1/2-3	1/2	1890	6	3350	2650	1500	----	76	75
	TXB15-3/4	TXB15-3/4-3	3/4	2200	6	3900	3400	2700	1150	78	85
18"	TXB18-1/4	TXB18-1/4-3	1/4	1600	6	3050	2000		----	76	80
	TXB18-1/3	TXB18-1/3-3	1/3	1725	6	3375	2600	1400	----	77	85
	TXB18-1/2	TXB18-1/2-3	1/2	1890	6	3850	3100	2000	----	78	95
	TXB18-1	TXB18-1-3	1	1725	6	4600	4080	3000	2100	77	105
24"	TXB18-1 1/2	TXB18-1 1/2-3	1.5	1990	6	5350	4830	3950	3000	80	105
	TXB24-1/2	TXB24-1/2-3	1/2	1298	6	5643	4826	3500	----	78	120
	TXB24-3/4	TXB24-3/4-3	3/4	1600	6	6906	5900	4650	2750	80	130
	TXB24-1	TXB24-1-3	1	1725	6	7425	6350	5000	3300	84	140
	TXB24-1 1/2	TXB24-1 1/2-3	1.5	1540	6	8200	7650	6850	5500	81	145
	TXB24-2	TXB24-2-3	2	1600	6	9760	8830	8090	7000	82	170
	-----	TXB24-3-3	3	1725	6	10500	9500	8700	7800	86	190
	TXB27-3/4	TXB27-3/4-3	3/4	1250	6	8330	7550	6500	4650	78	150
27"	TXB27-1	TXB27-1-3	1	1400	6	9400	8480	7300	5200	82	155
	TXB27-1 1/2	TXB27-1 1/2-3	1.5	1600	6	10700	9700	8375	6000	84	170
	TXB27-2	TXB27-2-3	2	1350	6	11500	10700	9300	8000	81	210
	TXB30-1/2	TXB30-1/2-3	1/2	1140	4	8900	6660	2300	----	79	140
30"	TXB30-1	TXB30-1-3	1	1298	6	9867	7980	4120	----	82	150
	TXB30-1 1/2	TXB30-1 1/2-3	1.5	1035	6	11100	9700	7500	3500	78	165
	TXB30-2	TXB30-2-3	2	1176	6	12100	11000	9322	6700	81	215
	-----	TXB30-3-3	3	1350	6	13480	12498	11465	10380	84	215
	-----	TXB30-5-3	5	1650	6	16440	15242	13982	12659	88	230
	TXB34-1 1/2	TXB34-1 1/2-3	1.5	1170	6	13695	11100	6000	1015	82	190
34"	TXB34-2	TXB34-2-3	2	1027	6	14657	12590	10000	8000	81	240
	-----	TXB34-3-3	3	1175	6	17580	15896	14095	12000	85	260
	-----	TXB34-5-3	5	1416	6	20500	19000	17500	16000	88	305
	TXB42-1 1/2	TXB42-1 1/2-3	1.5	750	4	18960	14662	7200	----	78	250
42"	TXB42-2	TXB42-2-3	2	820	4	20700	17002	11400	4000	80	260
	-----	TXB42-3-3	3	890	4	23700	20200	16970	9950	82	260
	-----	TXB42-5-3	5	850	6	26900	24403	22250	18400	82	270
48"	-----	TXB48-5-3	5	800	6	33000	29000	25600	20000	85	375
	-----	TXB48-7 1/2-3	7.5	900	6	37000	34500	31000	27000	87	520

Dimensions

SIZE	HOUSING INNER DIMENSION	HOUSING OUTER DIMENSION	BOLT HOLE CENTERS	HOUSING DEPTH
12"	12"	14"	13 1/8"	12"
15"	15"	17"	16 1/8"	12"
18"	18"	20"	19 1/8"	12"
24"	24"	27"	25 3/4"	12" & 16"
27"	27"	30"	28 3/4"	16"
30"	30"	33"	31 3/4"	16"
34"	34"	37"	35 3/4"	16"
42"	42"	45"	43 1/16"	18"
48"	48"	51"	49 3/16"	24"

Note: Products listed in this section are custom built and subject to 100% cancellation/restocking charges.

Power Attic Mount Dome Ventilator



Note: Photograph is a representation of stocked models.
Actual model may vary in appearance.

Features

- 120V Motor / 1-Phase
- Automatic thermostat (90°-130°F)
- Insect and bird screen installed
- Powder coated metal dome and base

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	DOMES COLOR	SPEED	CFM .03 SP	VOLTS	HP	RPM	ATTIC SIZE / SQ. FT.	WT. (LBS)
08664202	PDV-305-1MB-GY	Gray	1	1000	120	1/12	1050	Average/1600	18
08664302	PDV-305-1MB-BR	Brown	1	1000	120	1/12	1050	Average/1600	18
08664402	PDV-305-1MB-BLK	Black	1	1000	120	1/12	1050	Average/1600	18

Gable Exhaust Fan




Features

- 120V motor / 1-Phase
- Automatic adjustable thermostat (90°-130°F)
- Partially assembled (mounting tabs must be assembled)
- 15" diameter x 6" depth
- 4 mounting tabs on 16" centers

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	CFM .03 SP	ATTIC SIZE/ ST. FT.	WT. (LBS)
08663702	GV-405-2B	Gable Mount Ventilator	1300	average/2000	11
08665202	AGD-1416B	Aluminum Damper for GV-405-2	----	----	3

Belt Drive Wholehouse Fans



Features


- 120V, 1-Phase, 2-Speed motors
- Shutters automatically open when fan is turned on and close tightly when fan is turned off
- Made in U.S.A.

NOTE: Belt Drive Fan with "No Joist Cut" Shutter.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	SIZE	SPEED	MOTOR HP	CFM @ .1 IN. H2O PRESSURE DROP w/ SHUTTER	FAN SPEED RPM	FAN MOUNTING DIMENSIONS (IN)	EXHAUST SQ. FT. REQ'D	AMPS	WT. (LBS)
07936202	BD24-2-WHS	24"	2	1/3	4500/2700	612/410	28 29.5 14.5	7	5.7/4.8	40
07936302	BD30-2-WHS	30"	2	1/3	7600/5800	520/350	34 35.5 14.5	9	6.9/5.5	50
07936402	BD36-2-WHS	36"	2	1/3	9675/6400	395/265	40 41.5 14.5	12	6.3/3.1	64

Fan Dimensions

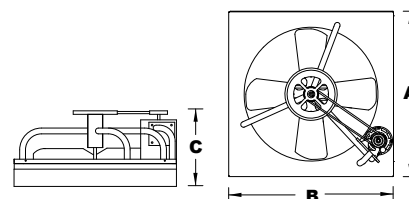

Ceiling Shutters

MFG CATALOG NUMBER	MFG MODEL NUMBER	FIT HOLE SIZE (I.D.)	OUTSIDE SIZE (O.D.)	FAN SIZE	WT. (LBS)
07944802	CS-10-W	26X26	28X28	24"	8
07944602	CS-13-W	32X34	34X36	30"	10
07945302	CS-14-W	34X34	36X36	30"	10
07944702	CS-18-W	32X43	34X45	36"	11
07945202	CS-19-W	34X43	36X45	36"	11

Control Options

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	WT. (LBS)
07927002	2-SW	2 Speed wall switch & plate	1
05000802	1A22-7	SP Close on rise (Attic Thermostat) (80°-130°F)	1

"Joist out style" (For replacement only)

Portable Utility Lights

42

4 Sources of Light Sources



LED 37

- 30,000+ hour lamp life
- Safety glass front lens cover
- NEMA 4 rated enclosure
- Can be used with pedestal, cart, and tripod mounts only.
- Compliant with RoHS 2 Directive (2011/65/EU).

LED 1 & 2

- Longest Lamp Life
- Lowest energy usage per lumens produced.
- 12 Watt LED bulbs (included)
- Shade remains Cool-to-the-Touch.

Fluorescent

- Uses compact, low energy use
- Long life 55 Watt Fluorescent bulbs (included)
- Shade remains Cool-to-the-Touch.

Quartz Halogen

- High light output
- Weatherproof aluminum die-cast light heads
- 500 Watt quartz bulbs (included).

6 Types of Bases and Mounts

Pedestal Base

- 16 gauge round steel tube construction
- Height adjustable from 5'-6" to 8'-6" high
- 18" heavy duty steel base




Cart Base

- 16 gauge round steel tube construction
- Height adjustable from 5' to 8' high
- 10" diameter wheels



Tripod Base

- 20 gauge round steel tube construction
- Height adjustable from 3' to 6'-6" high
- Base covers 46" diameter area



Floor Base

- 12 gauge steel base
- Handle included
- Base covers 16" diameter area



Clamp-On Mount

- Clamp secures light head to most surfaces up to 3"



Magnet Mount


- 210 lb. magnetic strength
- 1/4" steel arm
- Extends 6" from mounting surface



Light Selection Chart & Illumination Levels

LIGHT SOURCE:		QUARTZ HALOGEN		FLUORESCENT		LED		LED 37	
# OF LIGHT HEADS		1	2	1	2	1	2	1	2
MAX. WATTAGE		500	1,000	55	110	12	24	37	74
MAX. LUMENS		11,000	22,000	3,000	6,000	960	1,920	2,373	4,746
AVG. BULB LIFE (HRS.)		2,000		10,000		50,000		>30,000	
WIRE GUARD INCLUDED		Yes		Yes		Yes		No	
BULB INCLUDED		Yes		Yes		Yes		Yes	
LIGHT SOURCE ILLUMINATION LEVELS									
Measured Footcandles & Distance from Light Source (open area)	5' ft.	74.4	137.3	20.0	35.8	224.5	456.8	448.1	896
	10' ft.	36.1	65.9	8.7	14.8	121.4	258.8	299	598
	20' ft.	13.2	24.6	3.1	5.1	29.0	64.0	71	142
	30' ft.	6.6	12.3	1.7	2.5	14.2	31.4	34	68

Task Lighting...

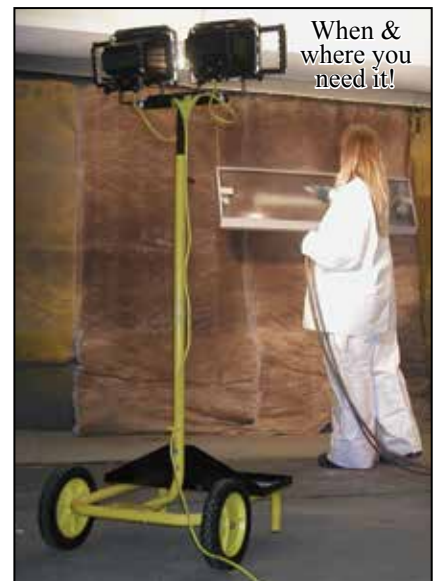

ATTENTION

Fluorescent and HID lamps contain mercury. Dispose of these lamps according to local, state, or federal laws. For further information on local, state, or other requirements for disposal of mercury-containing lamps, see <http://www.lamprecycle.com>.

Portable Utility Lights

43

Incandescent, Fluorescent, and LED Series

Features

- Chip resistant safety yellow & black powder coating finish for high visibility and durability
- 15' long 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- Shade will swivel 300° horizontally and 210° vertically
- On/Off switch, bulb, and wire guard included on each light head
- Made in U.S.A. with domestic and foreign components

Lamp Specifications - LED & FL

- Aluminum shade is 9 3/8" long with 7 3/4" diameter opening and will swivel 300° horizontally and 210° vertically
- LED 1 & 2 models are designed with an acrylic lens cover over each of the 12 single Watt LED emitters. Constructed with narrow 15° angle beam generating 960 lumens per bulb.
- FL models include a 55W spiral fluorescent bulb and internal reflector for maximum illumination at shorter distances.
- ETL C/US Listed for indoor & semi-protected outdoor use

Lamp Specifications - LED-37

- Lexan housing
- Safety glass front lens cover
- NEMA 4 rated enclosure
- Can be used with dock arm, pedestal, cart, and tripod bases only.
- Push button on-off switch
- 15' power cord
- Compliant with RoHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.



Lamp Specifications - QH

- QH models include a 500 Watt quartz halogen bulb and weatherproof die cast aluminum light head with impact resistant lens
- Each shade size is 9" wide x 7 1/4" high x 9 3/4" deep
- ETL C/US listed for indoor & semi-protected outdoor use



Standard Models


MFG CATALOG NUMBER	MFG MODEL NUMBER	TYPE	DESCRIPTION	TOTAL MAX WATTS	# OF LIGHT HEADS	WT. (LBS)
04885402	LED-37-1*	LIGHTHEAD	LED	37	1	6
04885302	LED-37-2*			74	2	10
04873602	LED-1		LED	12	1	6
04873702	LED-2			24	2	9
04803002	FL-1		FLUORESCENT	55	1	5
04803402	FL-2			110	2	8
04802902	QH-1		QUARTZ HALOGEN	500	1	5
04803302	QH-2			1000	2	10
04802702	PED	MOUNT / BASE	PEDESTAL	----	----	31
04802802	CRT		CART	----	----	27
04802302	TRI		TRIPOD	----	----	9
04802602	FLR		FLOOR	----	----	4
04802402	CLP		CLAMP	----	----	2
04802502	MAG		MAGNET	----	----	3

*Cannot be used with clamp-on mount

Individual Portable Light Components - Replacement Bulbs

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	WATTS	USED WITH	WT. (LBS)
04850502	SSE-55	Fluorescent Bulb	55	ALL FL Light heads	1
04708502	LED-12	LED Bulb	12	ALL LED Light heads	1

LED Light Head with Mount

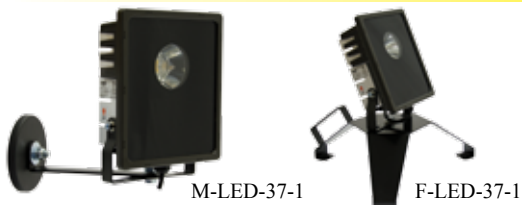

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	WATTS	WT. (LBS)
04888402	M-LED-37-1	LED with Magnet Mount	37	8
04888602	F-LED-37-1	LED with Floor Mount	37	9

Heavy Duty Portable Utility Lights

44



PUL-1000Q-CD

Quartz Halogen Light Heads

- (2) 500 Watt weatherproof die cast Aluminum light heads with 15' long, 3-conductor cord, and plug
- Quartz halogen lamps
- Impact resistant lens
- On-Off switch
- OSHA approved wire guards and bulb included with each light head
- Made in U.S.A. with domestic and foreign components.



PUL-1000Q-TC

Cart Light Stand With GFCI Features

- Upright adjust from 5' to 8' high
- 10" diameter rubber wheels
- 15' all-weather, water and oil resistant SJTW 18/3 cordset and molded NEMA 5-15 plug
- Weatherproof electrical box with a 15 Amp GFCI duplex receptacle

Tripod Light Stand Features

- Square 12 gauge steel tubing construction
- Adjustable legs fold up for storage, fold flat for sand bagging or can be set and locked at 6", 12", 18", or 24" ground clearances
- Height adjustable from 5' to 11' high
- Safety stop mechanism, at full extension, prevents the mast from being pulled out of the base
- 15' all-weather, water and oil resistant SJTW 18/3 cordset and molded NEMA 5-15 plug

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BASE TYPE	BULBS	WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)
04467802	PUL-1000Q-CD	CART	500W Quartz Halogen	1000	120	22,000	2,000	50
04468302	PUL-1000Q-TC	TRIPOD						41

Commercial Duty Portable Utility Lights

CL 300 (Clamp on Model)



Features


- Ceramic socket will accept incandescent bulbs A-19, R-40 or PAR bulbs up to 300 Watt. Fixture will also accept infrared heat lamps up to 250 Watts
- 8' long - 18/3 SPT cordset with NEMA 5-15 plug
- Imported to TPI specifications.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BASE TYPE	DESCRIPTION	MAX. WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE HOURS	WT. (LBS)
02804900	CL-300	CLIP-ON	LED	11	120	800	25,000	3

CL-300 is shipped in ONE carton. LED bulb included.

Light Head Features

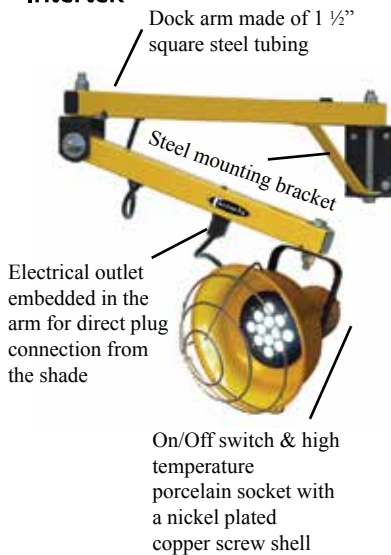

- Chip resistant safety yellow & black powder coating finish for high visibility and durability
- 5' long 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- On/Off switch & wire guard included on each light head
- 1 1/2" square, 11-gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attached with (4) 3/8" bolts (not supplied)
- (4) Lighting Sources to select from: incandescent, quartz halogen, LED, or fluorescent
- (2) Arm Lengths: 40" or 60" (plus 25" flex arm, incandescent only)
- VA models include (2) dock arms with a vertical adjustment bracket allowing outer arm to adjust from 300° horizontally and 210° vertically
- All light heads will swivel 300°
- Bulbs included with all light heads, except incandescent models
- ETL C/US Listed for indoor applications only, except QH models are semi-protected outdoor
- Made in U.S.A. with domestic and foreign components


Light Selection Chart & Illumination Levels

DESCRIPTION		Incandescent	Quartz Halogen	LED	LED 37	Fluorescent
MAX. WATTAGE		300	500	12	37	55
MAX. LUMENS		3,700	11,000	960	2,373	3,000
AVG. BULB LIFE (HRS.)		2,000	2,000	50,000	30,000	10,000
BULB INCLUDED		No	Yes	Yes	Yes	Yes
LIGHT SOURCE ILLUMINATION LEVELS						
Measured Footcandles & Distance from Light Source (inside trailer)	10' ft.	15	28	121	299	9
	20' ft.	5	14	29	71	3
	30' ft.	3	8	14	34	2
	40' ft.	2	5	4	9	---
	50' ft.	---	3	3	8	---

Dock Light Performance Testing

We measured light levels (in footcandles) inside a 8' x 9' x 53' trailer with a wooden floor and ceiling and white fiberglass walls. A matrix of nine measurements were taken at five work plains inside the trailer. Averages were figured along the center work plane of the trailer.

These charts measure the overall quality of truck trailer illumination from a selection of light sources. Many other factors such as: cost of energy, safety, availability of fixtures, cost of labor and replacement lamps should figure into your final decision.

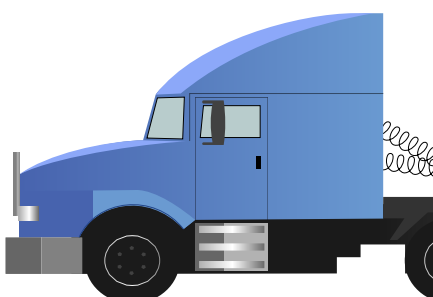

Light Source and Color Characteristics	10 ft.	20 ft.	30 ft.	40 ft.	50. ft
12W LED (Cool White)	121	29	14	3.7	3.2
37W LED (Cool White)	299	71	34	9	8
500W Quartz Halogen (Bright White)	28	14	8	5.3	3.1
300W Incandescent (Off White)	15	5	3	2.1	----
55W Fluorescent (Bright White)	9	3	2	----	----

Note: Above measurements are measured in footcandles

Loading Dock Lights - Fully Assembled Standard Duty Loading Dock Arms

46


(Light Head and Arm Bolted Together and Shipped in One Carton)

Standard Models (120 V)

Incandescent



Quartz



Fluorescent

MFG CATALOG NUMBER	MFG MODEL NUMBER	ARM LENGTH	# OF ARMS	MAX WATTS	WT. (LBS)
INCANDESCENT					
04466502	DKL-40VA-A	40"	2	300	14
04466602	DKL-60VA-A	60"	2		17
QUARTZ HALOGEN					
04467102	DKL-40VA-QH-A	40"	2	500	15
04467202	DKL-60VA-QH-A	60"	2		18
LED					
04708302	DKL-40VA-LED	40"	2	12	15
04708402	DKL-60VA-LED	60"	2		18
FLUORESCENT					
04850302	DKL-40VA-FL-A	40"	2	55	15
04850402	DKL-60VA-FL-A	60"	2		18

Note: Made in U.S.A. with domestic and foreign components

Ceiling Mounted Incandescent Flex Arm



Features

- Flexible elastomer arm moves when hit and then returns light to original position
- Ceramic socket will accept incandescent bulbs, R-40 or PAR bulbs up to 300W
- On-off toggle switch on light head

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	ARM LENGTH	WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)
03854002	DKL-25-FLX	25"	300	120	3,700	2000	7

*Bulb not included.

Light Head Accessories

Standard Models



LG-1



DLGS

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	WATTS	USED WITH	WT. (LBS)
03313222	LG-1	Lamp Guard	-	INC, LED, or FL Fixtures	2
04887402	DLGS	Light Head Guard (Small)	-	LED-37	.5
04887502	DLGL	Light Head Guard (Large)	-	LED, FL, QH	1
04850502	SSE-55	Fluorescent Bulb	55	ALL FL Light heads	1
04708502	LED-12	LED Bulb	12	ALL LED Light heads	1

Note: Lamp guards are included with every dock light fixture.

DLGS is shown with QH light head and 24" dock arm (sold separately)

Loading Dock Lights - Modular

47

Modular Lights



Features

- 14" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each light head
- Bulb included with all light heads except DKL-INC
- Imported to TPI specifications.
- DKL-LED-37 is compliant with ROHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)
04465602	DKL-INC	Incandescent	300	3,700	2,000	5
04465702	DKL-QH	Quartz Halogen	500	11,000	2,000	6
04708602	DKL-LED	LED	12	960	50,000	7
04881302	DKL-LED-37	LED	37	2,373	>30,000	5
04843302	DKL-FL	Fluorescent	55	3,000	10,000	7

Mounting Arms



The outer arm on 40" & 60" arms will swing 300° in horizontal plane & 210° in vertical plane

Features

- 1 1/2" square, 11 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	ARM LENGTH	TOTAL # OF ARMS	WT. (LBS)
04465402	DKL-40VA-ARM	40"	2	18
04465502	DKL-60VA-ARM	60"	2	24
04465302	24-LDA	24"	1	11
04466102	40-LDA**	40"	3	18
04466202	60-LDA**	60"	3	24

**Indicates heavy duty dock arms.

Loading Dock Arm Fan



Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards and aluminum blades.
- Imported to TPI specifications.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	CFM			AMPS HIGH	WT. (LBS)
		HIGH	MED	LOW		
07971802	LDF-18-TE	1800	1500	1300	2.2	20

Note: Must be used with LDA (Heavy Duty) mounting arms.

Machine Tool Lights

Water Resistant Fluorescent Tube Lights

48



Features

- ETL C/US Listed for NEMA Type 13 applications - oil / water / coolant spray areas (not submersible) and dusty atmospheres.
- Available with a durable, lightweight, economical, shatter resistant polycarbonate tube housing
- Model 21-TLP-IB-C includes a remote ballast, cordset, and on/off switch
- Stainless steel mounting hardware and fluorescent bulb are included
- 8' long, 18/3 SJTOW cord with NEMA 5-15 plug on models with cords
- EOB units with internal ballast are factory wired for 120V w/ 8' long cordset. Units can be field converted for direct wiring for 90V to 277V. Terminal block provided for easy wire installation.
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	WATTS	VOLTS	LUMENS	OVERALL LENGTH	TUBE MATERIAL	BALLAST INCLUDED	WT. (LBS)
02823200	21-TLP-IB-C	REMOTE BALLAST WITH CORDSET	36	120V	2900	21"	Polycarbonate	Yes	10
04829502	29-TLP-EOB-C	INTERNAL BALLAST WITH CORDSET	36	90 to 277V	2900	29"	Polycarbonate	Yes	7
04843402	29-TLP-A	REMOTE BALLAST	50	120V	4300	29"	Polycarbonate	Yes	7
04829302	23-TLP-24VDC	INTERNAL BALLAST	18	24VDC*	1250	23"	Polycarbonate	Yes	6

* Includes 2 ft. lead wires

Accessories - Replacement Lamps

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	USED WITH	WT. (LBS)
3103300	TL-RB-18	Fluorescent Replacement Bulb, 18W, PL-L	All 18 Watt Models	1
3100800	TL-RB-36	Fluorescent Replacement Bulb, 36W, PL-L	All 36 Watt Models	1
3108200	TL-RB-50	Fluorescent Replacement Bulb, 50W, PL-L	All 50 & 100 Watt Models	1

Heavy Duty Machine Tool Lights

Incandescent

49



Features

- Patented disc and collar swivel joints with adjustable bar knobs for securing arms into a variety of positions
- Shades constructed of a 22 Gauge steel and arms made of 5/8" steel tubing, with reach from 29" to 38"
- Charcoal gray powder coated finish
- Horizontal or vertical bolt down mounting bracket
- 10 amp rocker type on-off switch and lamp socket
- Includes an 8' 18/3 SJTO Cordset with NEMA 5-15 molded grounded plug for 120V operation
- LED bulb included
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BULB TYPE	BULB DESCRIPTION	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	WT. (LBS)
03812101	55-VCX-701B	LED	60 Watt Equivalent	11	800	25,000	29"	6
03813101	66-VCX-701B						38"	

Medium Duty, Flexible Arm, Incandescent, Machine Tool Lights



Features

- Chrome plated, flexible arm
- 8' 18/3 or 18/2 SPT cordset with molded plug
- Turn knob on-off switch
- Phenolic shade with spun Aluminum inner reflector on R - Series
- LED bulb included
- Imported to TPI specifications.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	BULB	BASE	MAX LUMENS	OVER-ALL REACH	WT. (LBS)
04423002	12-R-M-3	11 Watt	Magnetic Base	800	12"	3

Illuminated Florescent Magnifiers



Features

- 5", 8-diopter (3X power) magnifying clear lens for 200% magnification of an object with a focal length of 5"
- Suspension spring balanced arm assembly allowing up to 45" reach, with finger tighten control knobs to lock arms and shade into position
- 6' cordset with 2 prong polarized plug
- Housing consists of a sturdy white plastic 8 1/2" shade with an on-off rocker switch and glare protection cover located on the top of the shade
- Includes die-cast clamp-on base to attach to a flat surface up to 2-1/2" thick
- Factory installed 22W, 120V, T-9 deluxe cool white circline florescent lamp and protective lens
- Imported to TPI specifications.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	MAGNIFICATION POWER	BULB	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	WT. (LBS)
04851502	45-MAG-W	3X	22W. Circline	22	1800	16,000	45"	10
3120300	MAG-22W	22W., 120V., T-9 deluxe cool white circline replacement lamp						1

Model	Page	Model	Page	Model	Page	Model	Page
12-R-M-3	49	AGD-1416B	41	CE 20-DS	23	CES-48	26
1A22-7	41	BD24-2-WHS	41	CE 20-DV	25	CESM-24	32
2-SW	41	BD30-2-WHS	41	CE 24-D	24	CESM-30	32
21-TLP-IB-C	48	BD36-2-WHS	41	CE 24-DS	23	CESM-36	32
23-TLP-24VDC	48	CACM-P	7	CE 24-DV	25	CESM-42	32
24-LDA	47	CACU 24-P	9	CE 30-D	24	CESM-48	32
24-LDF-TE	19	CACU 24-PO	9	CE 30-DS	23	CESM-60	32
29-TLP-A	48	CACU 24-W	9	CE 30-DV	25	CF-12	18
29-TLP-EOB-C	48	CACU 24-WO	9	CE-24B	26	CF-18	18
40-LDA	47	CACU 30-P	9	CE-24B-3	26	CF-20	18
40-LDF-TE	19	CACU 30-P-HD	9	CE-30B	26	CHR-56	22
45-MAG-W	49	CACU 30-PO	9	CE-30B-3	26	CL-300	44
55-VCX-701B	49	CACU 30-PO-HD	9	CE-36B	26	CLP	43
60-LDA	47	CACU 30-W	9	CE-36B-3	26	CPB 30-D	10
60-LDF-TE	19	CACU 30-WO	9	CE-42B	26	CPB 36-B	10
66-VCX-701B	49	CAS - 18	14	CE-42-B-3	26	CPB 36-D	10
AC-24GB	7	CAS - 48	14	CE-48B	26	CPB 42-B	10
AC-30GB	7	CBT-24B	31	CE-48-B-3	26	CPB 48-B	10
AC-MOT	7	CBT-24B-3	31	CEFP-12	34	CPBS 24-DHV	10
AC-MOT-O	7	CBT-30B	31	CEFP-16	34	CPBS 30-D	10
ACH 20	7	CBT-30B-3	31	CEFP-18	34	CRT	43
ACH 20-O	5	CBT-36B	31	CEFP-20	34	CS-10-W	41
ACH 24	5	CBT-36B-3	31	CEFP-24	34	CS-13-W	41
ACH 24-EX1	8	CBT-42B	31	CEFP-30	34	CS-14-W	41
ACH 24-EX3	8	CBT-42B-3	31	CEFP-36	34	CS-18-W	41
ACH 24-O	5	CBT-48B	31	CEFP-42	34	CS-19-W	41
ACH 24-TE3	8	CBT-48B-3	31	CEFP-48	34	CU-20	18
ACH 30-TE3	8	CD-18	35	CEFP-60	34	DKL-25-FLX	46
ACH 30	5	CD-24	35	CES-12	32	DKL-40VA-A	46
ACH 30-EX1	8	CD-30	35	CES-16	32	DKL-40VA-ARM	47
ACH 30-EX3	8	CD-36	35	CES-18	32	DKL-40VA-FL-A	46
ACH 30-O	5	CD-42	35	CES-20	32	DKL-40VA-LED	46
ACM-C	2, 5, 7, 8	CD-48	35	CES-24	26, 32	DKL-40VA-QH-A	46
ACM-I	2, 5, 7, 8	CD-54	35	CES-30	26, 32	DKL-60VA-A	46
ACM-P	2, 5, 7, 8	CD-60	35	CES-36	26, 32	DKL-60VA-ARM	47
ACM-PM	2, 5, 7, 8	CE 10-D	24	CES-42	26, 32	DKL-60VA-FL-A	46
ACM-S	2, 5, 7, 8	CE 10-DS	23	CES-48	26, 32	DKL-60VA-LED	46
ACM-W	2, 5, 7, 8	CE 10-DV	25	CES-54	32	DKL-60VA-QH-A	46
ACM-WK	2, 4, 5, 7, 8	CE 12-D	24	CES-60	32	DKL-FL	19, 47
ACU 20-P	7	CE 12-DS	23	CES-10G	24, 25	DKL-INC	19, 47
ACU 20-PO	7	CE 12-DV	25	CES-12G	24, 25	DKL-LED	19, 47
ACU 20-W	7	CE 14-D	24	CES-14G	24, 25	DKL-LED-37	47
ACU 20-WO	7	CE 14-DS	23	CES-16G	24, 25	DKL-QH	19, 47
ACU 24-P	6	CE 14-DV	25	CES-18G	24, 25	DLGL	46
ACU 24-PO	6	CE 16-D	24	CES-20G	24, 25	DLGS	46
ACU 24-W	6	CE 16-DS	23	CES-24	26	DMKP1	35
ACU 24-WO	6	CE 16-DV	25	CES-24G	24, 25	DMKP2	35
ACU 30-P	6	CE 18-D	24	CES-30	26	EHB24-1	30
ACU 30-PO	6	CE 18-DS	23	CES-30G	24, 25	EHB24-1-3	30
ACU 30-W	6	CE 18-DV	25	CES-36	26	EHB24-1/2	30
ACU 30-WO	6	CE 20-D	24	CES-42	26	EHB24-1/2-3	30

Product Index Listing

Model	Page	Model	Page	Model	Page	Model	Page
EHB24-1/4	30	EHB48-3/4-3	30	EHD36-2	29	FLS-60	35
EHB24-1/4-3	30	EHB48-5-3	30	EHD36-2-3	29	GACM-P	5
EHB24-3/4	30	EHB60-1	30	EHD36-3-3	29	GV-405-2B	41
EHB24-3/4-3	30	EHB60-1 1/2	30	EHD36-5-3	29	HD-24GB	7
EHB30-1	30	EHB60-1 1/2-3	30	EHD42-1-3	29	HD-24GB-C	7
EHB30-1 1/2	30	EHB60-1-3	30	EHD42-2	29	HD-30GB	7
EHB30-1 1/2-3	30	EHB60-2	30	EHD42-2-3	29	HD-30GB-C	7
EHB30-1-3	30	EHB60-2-3	30	EHD42-3-3	29	HD-MOT	7
EHB30-1/2	30	EHB60-3-3	30	EHD42-5-3	29	HDH 24	4
EHB30-1/2-3	30	EHB60-5-3	30	EHD48-3-3	29	HDH 24-G	5
EHB30-1/3	30	EHD12-1/4	29	EHD48-5-3	29	HDH 24-GJR	2
EHB30-1/3-3	30	EHD12-1/4-3	29	EHD60-10-3	29	HDH 24-JR	2
EHB30-1/4	30	EHD16-1/4	29	EHD60-3-3	29	HDH 30	4
EHB30-1/4-3	30	EHD16-1/4-3	29	EHD60-5-5	29	HDH 30-G	5
EHB30-3/4	30	EHD18-1/2	29	EHD60-7 1/2-3	29	HDH 30-GJR	2
EHB30-3/4-3	30	EHD18-1/2-3	29	EMF-12	33	HDH 30-JR	2
EHB36-1	30	EHD18-1/3	29	EMF-16	33	HDHR-56	22
EHB36-1 1/2	30	EHD18-1/3-3	29	EMF-20	33	HDHR-56WR	22
EHB36-1 1/2-3	30	EHD20-1	29	EMF-24	33	HDHR-60	22
EHB36-1-3	30	EHD20-1-3	29	EMF-30	33	HDHR-60WR	22
EHB36-1/2	30	EHD20-1/2	29	EMF-36	33	HDM-C	2, 4, 7
EHB36-1/2-3	30	EHD20-1/2-3	29	EMF-42	33	HDM-I	2, 4, 7
EHB36-1/3	30	EHD20-1/4	29	EMF-48	33	HDM-P	2, 4, 7
EHB36-1/3-3	30	EHD20-1/4-3	29	EMF-60	33	HDM-W	2, 4, 7
EHB36-2	30	EHD24-1	29	EVAP-Mini 700	20	HR-GUARD	22
EHB36-2-3	30	EHD24-1-3	29	EVAP16HD	21	IBG-12	33
EHB36-3/4	30	EHD24-1/2	29	EVAP24HD	21	IBG-16	33
EHB36-3/4-3	30	EHD24-1/2-3	29	EVAP36HD	21	IBG-18	33
EHB42-1	30	EHD24-1/3	29	EVAP36-HAZ	20	IBG-20	33
EHB42-1 1/2	30	EHD24-1/3-3	29	EVAP48HD	21	IBG-24	33
EHB42-1 1/2-3	30	EHD24-1/4	29	EVAP48-HAZ	20	IBG-30	33
EHB42-1-3	30	EHD24-1/4-3	29	F-12-TE	17	IBG-36	33
EHB42-1/2	30	EHD24-2	29	F-18-CR	17	IBG-42	33
EHB42-1/2-3	30	EHD24-2-3	29	F-18-TE	17	IBG-48	33
EHB42-1/3	30	EHD24-3-3	29	F-18H-CR	17	IBG-60	33
EHB42-1/3-3	30	EHD24-3/4	29	F-18H-TE	17	IE24-1	28
EHB42-2	30	EHD24-3/4-3	29	F-24-CR	17	IE24-1-3	28
EHB42-2-3	30	EHD30-1 1/2	29	F-24-TE	17	IE24-1/2	28
EHB42-3-3	30	EHD30-1 1/2-3	29	F-24H-CR	17	IE24-1/2-3	28
EHB42-3/4	30	EHD30-1-3	29	F-24H-TE	17	IE24-1/3	28
EHB42-3/4-3	30	EHD30-1/2	29	F-LED-31-1	43	IE24-1/3-3	28
EHB48-1	30	EHD30-1/2-3	29	FL-1	43	IE24-3/4	28
EHB48-1 1/2	30	EHD30-1/3	29	FL-2	43	IE24-3/4-3	28
EHB48-1 1/2-3	30	EHD30-1/3-3	29	FLR	43	IE30-1	28
EHB48-1-3	30	EHD30-2	29	FLS-18	35	IE30-1-3	28
EHB48-1/2	30	EHD30-2-3	29	FLS-24	35	IE30-1/2	28
EHB48-1/2-3	30	EHD30-3-3	29	FLS-30	35	IE30-1/2-3	28
EHB48-2	30	EHD30-3/4	29	FLS-36	35	IE30-1/3	28
EHB48-2-3	30	EHD30-3/4-3	29	FLS-42	35	IE30-1/3-3	28
EHB48-3-3	30	EHD36-1	29	FLS-48	35	IE30-3/4	28
EHB48-3/4	30	EHD36-1-3	29	FLS-54	35	IE30-3/4-3	28

Model	Page	Model	Page	Model	Page	Model	Page
IE36-1	28	IHP 20-H-WD	8	MCD36-2	14, 15	PCBT 36-B	16
IE36-1 1/2	28	IHP 24-H	5	MCD36-3	14, 15	PCBT 42-B	16
IE36-1 1/2-3	28	IHP 24-H-277	8	MCD36-5	14, 15	PCBT 48-B	16
IE36-1-3	28	IHP 24-H-WD	8	MCD42-2	14	PDV-305-1MB-BLK	41
IE36-1/2	28	IHP 30-H	5	MCD42-5	14	PDV-305-1MB-BR	41
IE36-1/2-3	28	IHP 30-H-277	8	MCD48-10	14	PDV-305-1MB-GY	41
IE36-1/3	28	IHP 30-H-WD	8	MCD48-5	14	PED	43
IE36-1/3-3	28	IHP-MOT	7	MCD48-7 1/2	14	PM-1	18
IE36-2	28	IHR-48	22	MCD60-10	14	PM-1.5	18
IE36-2-3	28	IHR-56	22	MCD60-15	14	PM-18C	22
IE36-3/4	28	IHR-56-277V	22	MCD60-3	14	PM-18FO	22
IE36-3/4-3	28	IHR-56R	22	MCD60-5	14	PM-18S	22
IE42-1	28	KBWC-15	22	MCD60-7 1/2	14	PM-2	18
IE42-1 1/2	28	KBWC-13K	22	MK-1	32	PM-2.5	18
IE42-1 1/2-3	28	KBWC-15	22	MK-2	32	PM-3	18
IE42-1-3	28	KBWC-15SK	22	N-12	19	PUL-1000Q-CD	44
IE42-2	28	KBWC-310K	22	NK-PM18	22	PUL-1000Q-TC	44
IE42-2-3	28	LDF-18-TE	47	ODF-12	18	QH-1	43
IE42-3-3	28	LED-1	43	ODF-16	18	QH-2	43
IE42-3/4	28	LED-12	43, 46	OSF-16	18	R1-MOT	2
IE42-3/4-3	28	LED-2	43	PADEVAP16HD	21	R2-MOT	3
IE48-1	28	LED-37-1	43	PADEVAP24HD	21	RDS-18	35
IE48-1 1/2	28	LED-37-2	43	PADEVAP36HD	21	RDS-24	35
IE48-1 1/2-3	28	LG-1	46	PADEVAP48HD	21	RDS-30	35
IE48-1-3	28	M-LED-37-1	43	PADEVAP-Mini700	21	RDS-36	35
IE48-2	28	MAG	43	PB 30-D	11	RDS-42	35
IE48-2-3	28	MAG-22W	49	PB 36-B	12	RDS-48	35
IE48-3-3	28	MB 24-DF	16	PB 36-B-3	12	RDS-54	35
IE48-3/4	28	MB 24-DY	16	PB 36-B-HL	12	RDS-60	35
IE48-3/4-3	28	MB 30-DF	16	PB 36-D	11	RE24-1	36
IE48-5-3	28	MB 30-DY	16	PB 42-B	12	RE24-1-3	36
IE60-2	28	MBM-W	16	PB 42-B-3	12	RE24-1/2	36
IE60-2-3	28	MCD18-1	14, 15	PB 42-B-HL	12	RE24-1/2-3	36
IE60-3-3	28	MCD18-1/3	14, 15	PB 42-D	11	RE24-1/4	36
IE60-5-3	28	MCD18-1/4	14, 15	PB 48-B	12	RE24-1/4-3	36
IED12-1/4	27	MCD24-1	14, 15	PB 48-B-3	12	RE24-3/4	36
IED12-1/4-3	27	MCD24-1 1/2	14, 15	PB 48-B-HL	12	RE24-3/4-3	36
IED16-1/3	27	MCD24-1/2	14, 15	PB 48-D-OP	11	RE30-1	36
IED16-1/3-3	27	MCD24-1/3	14, 15	PBS 30-D	11	RE30-1 1/2	36
IED18-1/2	27	MCD24-1/4	14, 15	PBS 36-B	12	RE30-1 1/2-3	36
IED18-1/2-3	27	MCD24-3	14, 15	PBS 36-B-3	12	RE30-1-3	36
IED20-3/4	27	MCD24-3/4	14, 15	PBS 36-B-HL	12	RE30-1/2	36
IED20-3/4-3	27	MCD30-1	14, 15	PBS 36-D	11	RE30-1/2-3	36
IED24-1	27	MCD30-1 1/2	14, 15	PBS 42-B	12	RE30-1/3	36
IED24-1-3	27	MCD30-1/2	14, 15	PBS 42-B-3	12	RE30-1/3-3	36
IED30-1	27	MCD30-1/3	14, 15	PBS 42-B-HL	12	RE30-3/4	36
IED30-1-3	27	MCD30-2	14, 15	PBS 42-D	11	RE30-3/4-3	36
IED36-1 1/2	27	MCD30-3	14, 15	PBS 48-B	12	RE36-1	36
IED36-1 1/2-3	27	MCD30-3/4	14, 15	PBS 48-B-3	12	RE36-1 1/2	36
IED42-2-3	27	MCD36-1	14, 15	PBS 48-B-HL	12	RE36-1 1/2-3	36
IED48-3-3	27	MCD36-1 1/2	14, 15	PBS 48-D-OP	11	RE36-1-3	36

Product Index Listing

Model	Page	Model	Page	Model	Page	Model	Page
RE36-1/2	36	SB 36-B	13	TXB12-1/4	40	TXB34-1 1/2	40
RE36-1/2-3	36	SB 36-B-3	13	TXB12-1/4-3	40	TXB34-1 1/2-3	40
RE36-1/3	36	SB 36-B-HL	13	TXB12-3/4	40	TXB34-2	40
RE36-1/3-3	36	SB 36-D	13	TXB12-3/4-3	40	TXB34-2-3	40
RE36-2	36	SB 42-B	13	TXB15-1/2	40	TXB34-3-3	40
RE36-2-3	36	SB 42-B-3	13	TXB15-1/2-3	40	TXB34-5-3	40
RE36-3/4	36	SB 42-B-HL	13	TXB15-1/3	40	TXB42-1 1/2	40
RE36-3/4-3	36	SB 42-D	13	TXB15-1/3-3	40	TXB42-1 1/2-3	40
RE42-1	36	SB 48-B	13	TXB15-1/4	40	TXB42-2	40
RE42-1 1/2	36	SB 48-B-3	13	TXB15-1/4-3	40	TXB42-2-3	40
RE42-1 1/2-3	36	SB 48-B-HL	13	TXB15-3/4	40	TXB42-3-3	40
RE42-1-3	36	SCK-12	2, 3	TXB15-3/4-3	40	TXB42-5-3	40
RE42-1/2	36	SF-12	33	TXB18-1	40	TXB48-5-3	40
RE42-1/2-3	36	SF-16	33	TXB18-1 1/2	40	TXB48-7 1/2-3	40
RE42-2	36	SF-18	33	TXB18-1 1/2-3	40	TXD12-1/2	39
RE42-2-3	36	SF-20	33	TXB18-1-3	40	TXD12-1/2-3	39
RE42-3-3	36	SF-24	33	TXB18-1/2	40	TXD12-1/4	39
RE42-3/4	36	SLS-18	35	TXB18-1/2-3	40	TXD12-1/4-3	39
RE42-3/4-3	36	SLS-24	35	TXB18-1/3	40	TXD12-3/4	39
RE48-1	36	SLS-30	35	TXB18-1/3-3	40	TXD12-3/4-3	39
RE48-1 1/2	36	SLS-36	35	TXB18-1/4	40	TXD18-1	39
RE48-1 1/2-3	36	SLS-42	35	TXB18-1/4-3	40	TXD18-1-3	39
RE48-1-3	36	SLS-48	35	TXB24-1	40	TXD18-1/2	39
RE48-2	36	SLS-54	35	TXB24-1 1/2	40	TXD18-1/2-3	39
RE48-2-3	36	SLS-60	35	TXB24-1 1/2-3	40	TXD18-1/3	39
RE48-3-3	36	SR-12	33	TXB24-1-3	40	TXD18-1/3-3	39
RE48-3/4	36	SR-16	33	TXB24-1/2	40	TXD18-1/4	39
RE48-3/4-3	36	SR-18	33	TXB24-1/2-3	40	TXD18-1/4-3	39
RE48-5-3	36	SR-20	33	TXB24-2	40	TXD24-1	39
RE54-1	36	SR-24	33	TXB24-2-3	40	TXD24-1-3	39
RE54-1 1/2	36	SSE-55	43, 46	TXB24-3-3	40	TXD24-1/2	39
RE54-1 1/2-3	36	SW-1	14	TXB24-3/4	40	TXD24-1/2-3	39
RE54-1-3	36	SW-1 1/2	14	TXB24-3/4-3	40	TXD24-1/3	39
RE54-2	36	SW-1 1/2-3	14	TXB27-1	40	TXD24-1/3-3	39
RE54-2-3	36	SW-1-3	14	TXB27-1 1/2	40	TXD24-1/4	39
RE54-3-3	36	SW-1/2	14	TXB27-1 1/2-3	40	TXD24-1/4-3	39
RE54-5-3	36	SW-1/2-3	14	TXB27-1-3	40	TXD24-2	39
RE60-1	36	SW-1/4	14	TXB27-2	40	TXD24-2-3	39
RE60-1 1/2	36	SW-1/4-3	14	TXB27-2-3	40	TXD24-3-3	39
RE60-1 1/2-3	36	SW-2-3	14	TXB27-3/4	40	TXD24-3/4	39
RE60-1-3	36	SW-3-3	14	TXB27-3/4-3	40	TXD24-3/4-3	39
RE60-2	36	SW-5-3	14	TXB30-1	40	TXD27-1	39
RE60-2-3	36	SW-7 1/2-3	14	TXB30-1 1/2	40	TXD27-1-3	39
RE60-3-3	36	TL-RB-18	48	TXB30-1 1/2-3	40	TXD27-1/2	39
RE60-5-3	36	TL-RB-36	48	TXB30-1-3	40	TXD27-1/2-3	39
RE60-7 1/2-3	36	TL-RB-50	48	TXB30-1/2	40	TXD27-2	39
RS 06-EC	2, 3	TRI	43	TXB30-1/2-3	40	TXD27-2-3	39
RS 09-EC	2, 3	TXB12-1/2	40	TXB30-2	40	TXD30-1/2	39
RS 12-EC	2, 3	TXB12-1/2-3	40	TXB30-2-3	40	TXD30-1/2-3	39
RS 15-EC	2, 3	TXB12-1/3	40	TXB30-3-3	40	TXD30-2	39
SB 30-D	13	TXB12-1/3-3	40	TXB30-5-3	40	TXD30-2-3	39

Model	Page	Model	Page	Model	Page	Model	Page
TXD30-3-3	39	UEB36-1/2-3	38	UED30-1 1/2-3	37		
TXD30-3/4	39	UEB36-3/4	38	UED30-1-3	37		
TXD30-3/4-3	39	UEB36-3/4-3	38	UED30-2	37		
TXD34-1 1/2	39	UEB42-1	38	UED30-2-3	37		
TXD34-1 1/2-3	39	UEB42-1 1/2	38	UED30-3-3	37		
TXD34-2	39	UEB42-1 1/2-3	38	UED30-3/4	37		
TXD34-2-3	39	UEB42-1-3	38	UED30-3/4-3	37		
TXD34-3-3	39	UEB42-2	38	UED36-2	37		
TXD34-5-3	39	UEB42-2-3	38	UED36-2-3	37		
TXD36-2	39	UEB42-3-3	38	UED36-3-3	37		
TXD36-2-3	39	UEB42-3/4	38	UED36-5-3	37		
TXD36-3-3	39	UEB42-3/4-3	38	UED42-2	37		
TXD42-1-3	39	UEB48-1	38	UED42-2-3	37		
TXD42-2	39	UEB48-1 1/2	38	UED42-5-3	37		
TXD42-2-3	39	UEB48-1 1/2-3	38	UED48-10-3	37		
TXD42-3-3	39	UEB48-1-3	38	UED48-3-3	37		
TXD42-5-3	39	UEB48-2	38	UED48-5-3	37		
TXD48-3-3	39	UEB48-2-3	38	UED48-7 1/2-3	37		
TXD48-5-3	39	UEB48-3-3	38	UED60-10-3	37		
TXG-12	39	UEB48-3/4	38	UED60-5-3	37		
TXG-15	39	UEB48-3/4-3	38	UED60-7 1/2-3	37		
TXG-18	39	UEB54-1	38	UHP 24-CJR	3		
TXG-24	39	UEB54-1 1/2	38	UHP 24-IJR	3		
TXG-27	39	UEB54-1 1/2-3	38	UHP 24-P	6		
TXG-30	39	UEB54-1-3	38	UHP 24-PJR	3		
TXG-34	39	UEB54-2	38	UHP 24-SJR	3		
TXG-36	39	UEB54-2-3	38	UHP 24-W	6		
TXG-42	39	UEB54-3-3	38	UHP 24-WJR	3		
TXG-48	39	UEB54-5-3	38	UHP 30-CJR	3		
U-12-TE	18	UEB60-1 1/2	38	UHP 30-IJR	3		
U-18-CR	17	UEB60-1 1/2-3	38	UHP 30-P	6		
U-18-TE	18	UEB60-2	38	UHP 30-PJR	3		
U-24-CR	17	UEB60-2-3	38	UHP 30-SJR	3		
U-24-TE	18	UEB60-3-3	38	UHP 30-W	6		
UEB24-1/2	38	UEB60-5-3	38	UHP 30-WJR	3		
UEB24-1/2-3	38	UED18-1	37	WACM-P	7		
UEB24-1/3	38	UED18-1-3	37	WACM-W	7		
UEB24-1/3-3	38	UED18-1/2	37	WH-12	34		
UEB24-3/4	38	UED18-1/2-3	37	WH-16	34		
UEB24-3/4-3	38	UED18-1/3	37	WH-18	34		
UEB30-1	38	UED18-1/3-3	37	WH-20	34		
UEB30-1-3	38	UED18-1/4	37	WH-24	34		
UEB30-1/2	38	UED18-1/4-3	37	WH-30	34		
UEB30-1/2-3	38	UED24-1	37	WH-36	34		
UEB30-3/4	38	UED24-1-3	37	WH-42	34		
UEB30-3/4-3	38	UED24-1/4	37	WH-48	34		
UEB36-1	38	UED24-1/4-3	37	WH-60	34		
UEB36-1 1/2	38	UED24-3-3	37	X3	22		
UEB36-1 1/2-3	38	UED24-3/4	37				
UEB36-1-3	38	UED24-3/4-3	37				
UEB36-1/2	38	UED30-1 1/2	37				

