CABINET:
4100 series casing shall be of square design with front inlet and outlet grills suitable for recess installation. The cabinet is fabricated from 16 Gauge cold rolled steel and finished with powder coated baked enamel. Junction boxes are available for left or right wiring and connected by pre-wired 40 Amp capacity wireway.

ELEMENT:
All steel high mass element construction with Nickel-Chromium resistance wire embedded in compacted efficient dialectric to ensure proper heat transfer. Aluminum fins mechanically bonded to steel tube allows for increased surface area and even heat transfer.

LIMIT CONTROLS:
Automatic reset hydraulic thermal overload covers full length of heating element and shuts down heater when safe operating temperatures are exceeded.

WIRING:
Wiring connections shall be made in left end of cabinet enclosure. Wiring must enter into control enclosure behind perforated steel grill.

CONTROLS:
All controls are accessible only through control enclosure door. Security type fasteners restrict access to controls. Built in thermostat and disconnect switch with manual adjustment are located in control enclosure.

Click to Email

SUBMITTAL DATA, 4100 SERIES

Print Form

AGENT	PROJECT	ENGINEER	DATE

TAG					
QTY.					
MODEL					
LENGTH					
WATTS / FT.					
VOLTS / PHASE					
OPTIONS					
NOTES					

Not for residential applications.
Shown in bottom In / Top out configuration
Totally Recessable Version Available (M4125/M4145)

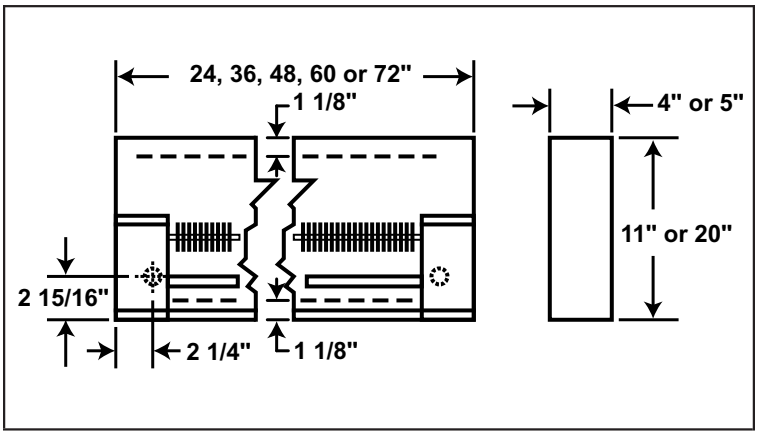

Model Specifications

MODEL	DIMENSION	MAX LENGTH
M4125	11” High x 4” Deep	6 Feet
M4145	20” High x 5” Deep	6 Feet

Raywall/Redd 1